

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	132S		Rated Output	5.5 kW 7.5 HP			
Type	HS		Number of Poles	2			
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load 9.6 A	11.1 A 19.2 A		
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	700 %	700 % 700 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load	85.8 %			
Motor Location	☒ Indoor ☐ Outdoor		75% Load	88.0 %			
Altitude	Less than 1000 meter		100% Load	88.5 %			
Relative Humidity	Less than 80 %		Power Factor(p.u)				
Ambient Temp.	40 deg. C (Max.)		50% Load	0.737			
Duty Type	Continuos (S1)		75% Load	0.810			
Service Factor	1.15		100% Load	0.850			
Mounting	☒ B3 ☐ B5 ☐ V1 ☐ B3/B5		Speed at Full Load	3530 r.p.m			
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	6208ZZC3 / 6208ZZC3	Full Load	1.5 kg·m			
	Lubricant	Grease(Polyrex-EM)	Locked-rotor**	190 %			
External Thrust	Not applicable		Breakdown**	300 %			
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)				
Shaft Extension	☒ Single ☐ Double		Load(Max.)	1.250 kg·m²			
Terminal Box	Main	☐ Steel ☒ Cast Iron	Motor	0.014 kg·m²			
	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)	76 dB(A)			
	Location	Refer to Outline Drawing	Vibration	1.6 mm/sec (r.m.s)			
Application			Permissible number of consecutive starts	Cold 3 times	Hot 2 times		
Area classification	Non-Hazardous		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		
Type of Ex-Protection	Not applicable		SUBMITTAL DRAWING				
Applicable Standard	KS,IEC,NEMA MG1 Part30(Vpeak)		Outline Dimension Drawing \ Motor Weight(Approx.)				
ACCESSORIES			B3	227B2000AB03	67 kg		
			B5		kg		
			V1		kg		
			B3/B5		kg		
			Main T-Box Ass'y	227B8004CB			
SPARE PARTS			REMARK				
			High Efficiency				
			* For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests.


** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.

HHI W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type	:	HS
Full Load Torque	:	1.5 Kg.m
Motor moment of Inertia (J)	:	0.014 Kg.m ²
Load moment of Inertia (J)	:	1.250 Kg.m ²

5.5 kW		2 P		60 Hz	
Speed at Full Load :				3530 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	9.6A	11.1A	19.2A		

SPEED VS TORQUE & CURRENT CURVE

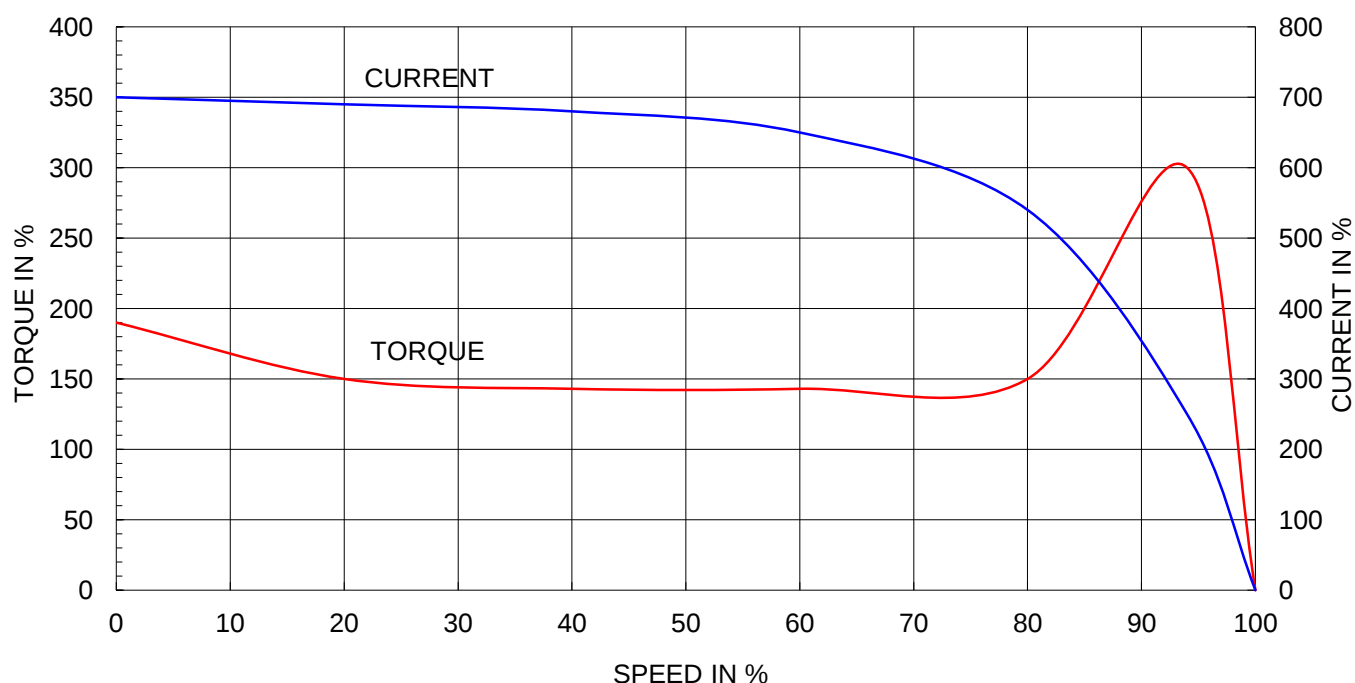

OUTPUT VS EFF., P.F & CURRENT CURVE

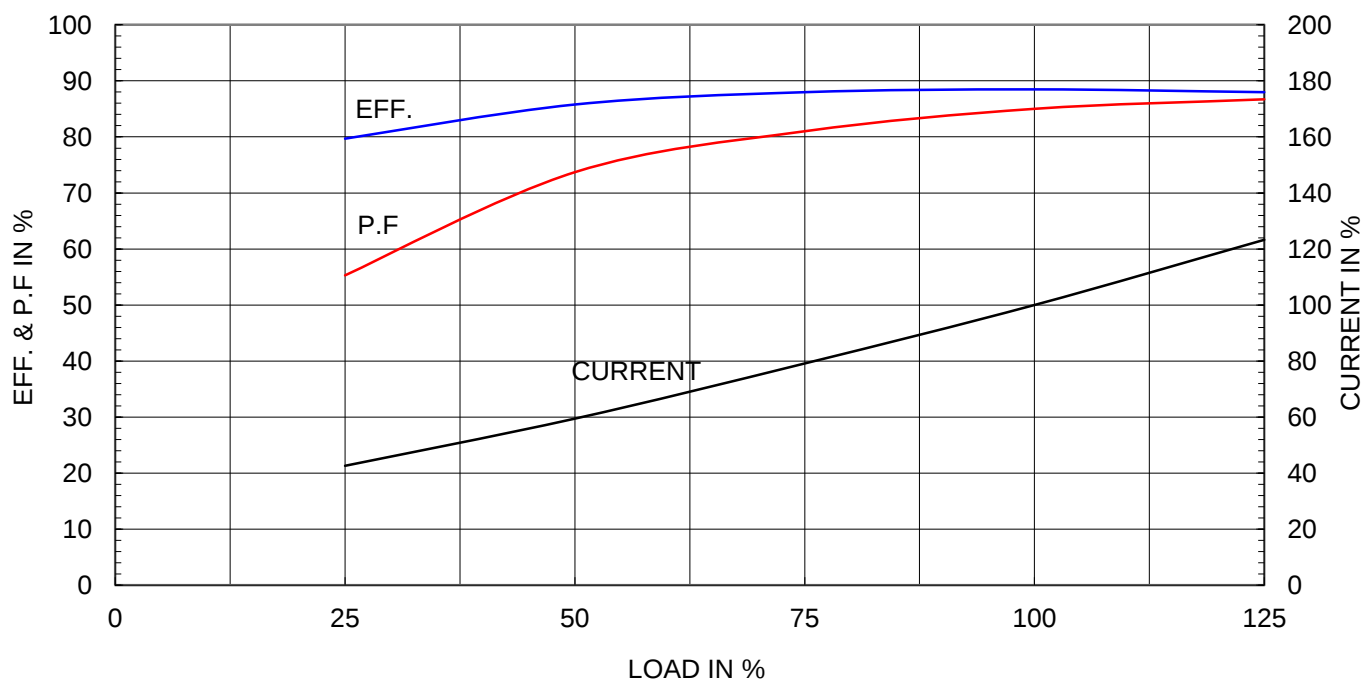




TEFC

THREE PHASE INDUCTION MOTOR

TYPE

HL, HLS


CAST IRON FRAME

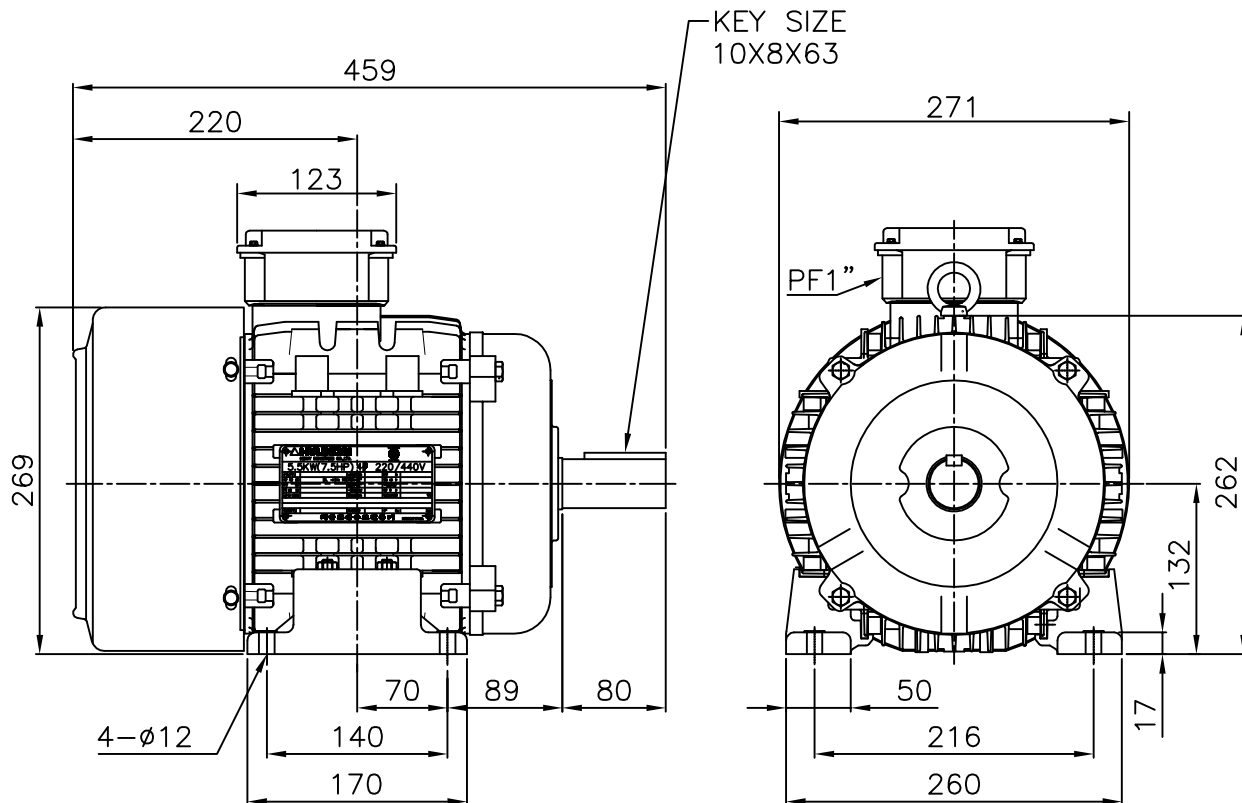

NOTE

1.TOLERANCE :



CENTER HEIGHT	132 ⁺⁰ _{-0.5}
BASE HOLES	ø12 ^{+0.43} ₋₀
SHAFT DIAMETER	ø38 ^{+0.018} _{+0.002}
KEYWAY WIDTH	10 ⁺⁰ _{-0.036}
KEYWAY DEPTH	5 ^{+0.2} ₋₀



CAST IRON CONDUIT BOX

APPD BY		UNIT	mm	SUBJECT	KS 132S	CAD PROJ \ FILE	
CHKD BY		SCALE	1/6			XSDNKS\B2000AC03	
CHKD BY	S. W. SEO	PROJEC'N	3rd Angle	TITLE OUTLINE			
DSND BY	J. S. JEONG	DATE	2009.8.11				
 HEAVY INDUSTRIES CO., LTD. Electro-Electric System Division				REF. NO	B2000AB03	Sheet No.	of
				DWG NO	227B2003AB03	Revision No.	0

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

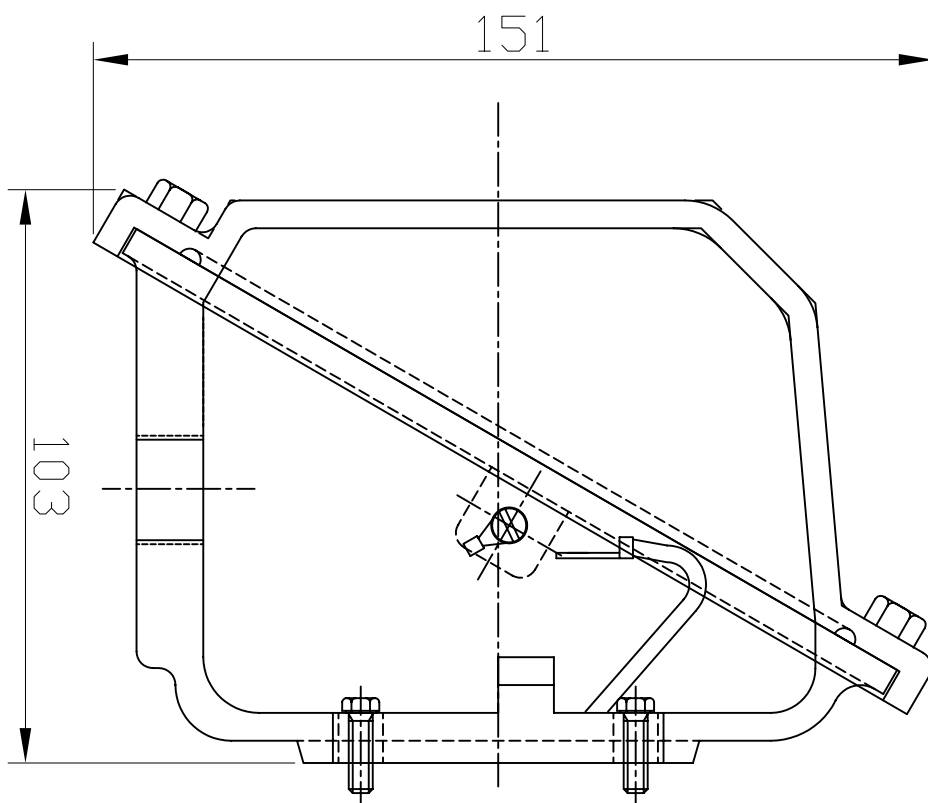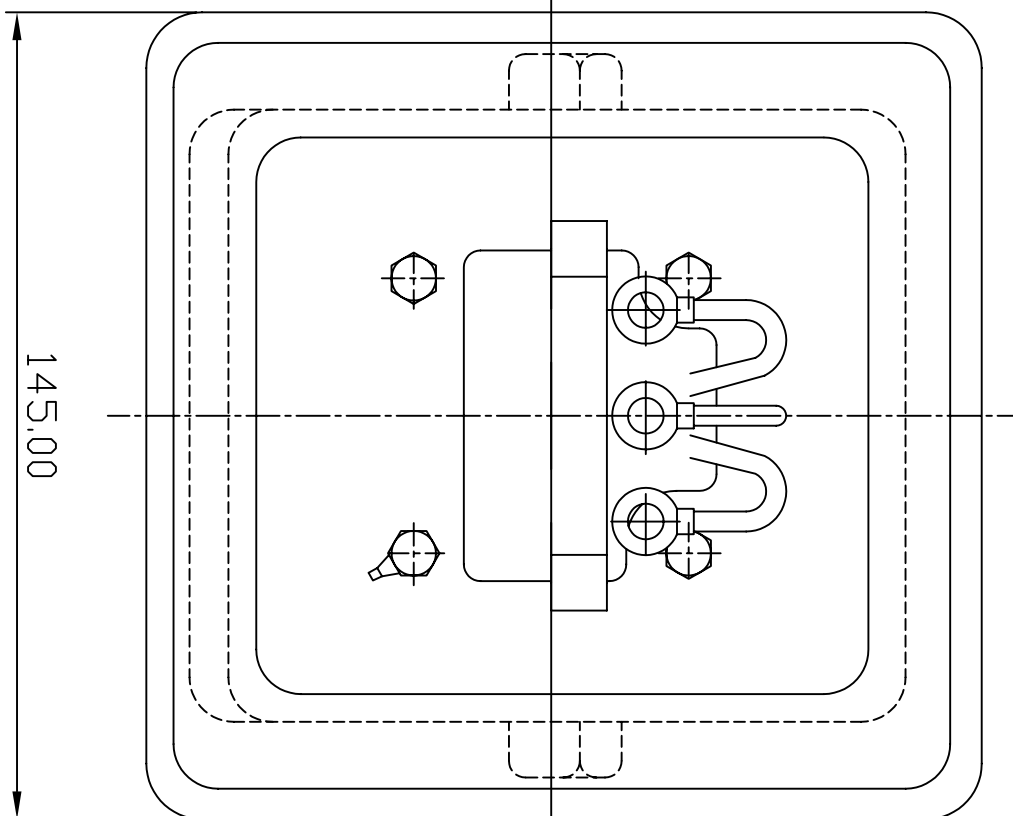

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	UNIT	MM	SUBJECT	IEC 100 - 132		CAD PRO. \ FILE XSMOUT\7B8004CB	
CHKD BY	SCALE	1/1	TITLE TERMINAL BOX ASS'Y				
CHKD BY	PROJ.E'N	3-#4(3rd Angle)					
DSND BY	DATE	2005.10.19.	REF. NO	7B8004CB	Sheet No.	of	
 HYUNDAI HEAVY INDUSTRIES CO., LTD. ELECTRICAL ENGINEERING DIVISION			DWG NO	227B8004CB	Revision No.	0	