

AC INDUCTION MOTOR DATA SHEET


Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	80M		Rated Output	0.75 kW 1 HP			
Type	HS		Number of Poles	4			
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load	1.7 A 2.0 A 3.4 A		
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	740 %	740 % 740 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load 76.5 %				
Motor Location	☒ Indoor ☐ Outdoor		75% Load 81.0 %				
Altitude	Less than 1000 meter		100% Load 82.5 %				
Relative Humidity	Less than 80 %		Power Factor(p.u)				
Ambient Temp.	40 deg. C (Max.)		50% Load 0.485				
Duty Type	Continuos (S1)		75% Load 0.610				
Service Factor	1.15		100% Load 0.704				
Mounting	☐ B3 ☒ B5 ☐ V1 ☐ B3/B5		Speed at Full Load 1735 r.p.m				
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	6204ZZ / 6203ZZ	Full Load 0.4 kg·m				
	Lubricant	Grease(SML4)	Locked-rotor** 360 %				
External Thrust	Not applicable		Breakdown** 390 %				
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)				
Shaft Extension	☒ Single ☐ Double		Load(Max.) 0.625 kg·m²				
Terminal	Main	☐ Steel ☒ Cast Iron	Motor 0.0016 kg·m²				
Box	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)				
	Location	Refer to Outline Drawing	0 dB(A)				
Application			Vibration 1.6 mm/sec (r.m.s)				
Area classification	Non-Hazardous		Permissible number of				
Type of Ex-Protection	Not applicable		Cold 3 times				
Applicable Standard	KS,IEC,NEMA MG1 Part30(Vpeak)		Hot 2 times				
ACCESSORIES			SUBMITTAL DRAWING				
			Outline Dimension Drawing \ Motor Weight(Approx.)				
			B3		kg		
			B5	227B5023TA02	14 kg		
			V1		kg		
			B3/B5		kg		
			Main T-Box Ass'y 227B1537AA				
SPARE PARTS			REMARK				
			High Efficiency				
			* For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
 Inspection and performance test shal


Type	:	HS
Full Load Torque	:	0.4 Kg.m
Motor moment of Inertia (J)	:	0.002 Kg.m ²
Load moment of Inertia (J)	:	0.625 Kg.m ²



0.75 kW		4 P		60 Hz	
Speed at Full Load :				1735 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	1.7A	2.0A	3.4A		

SPEED VS TORQUE & CURRENT CURVE

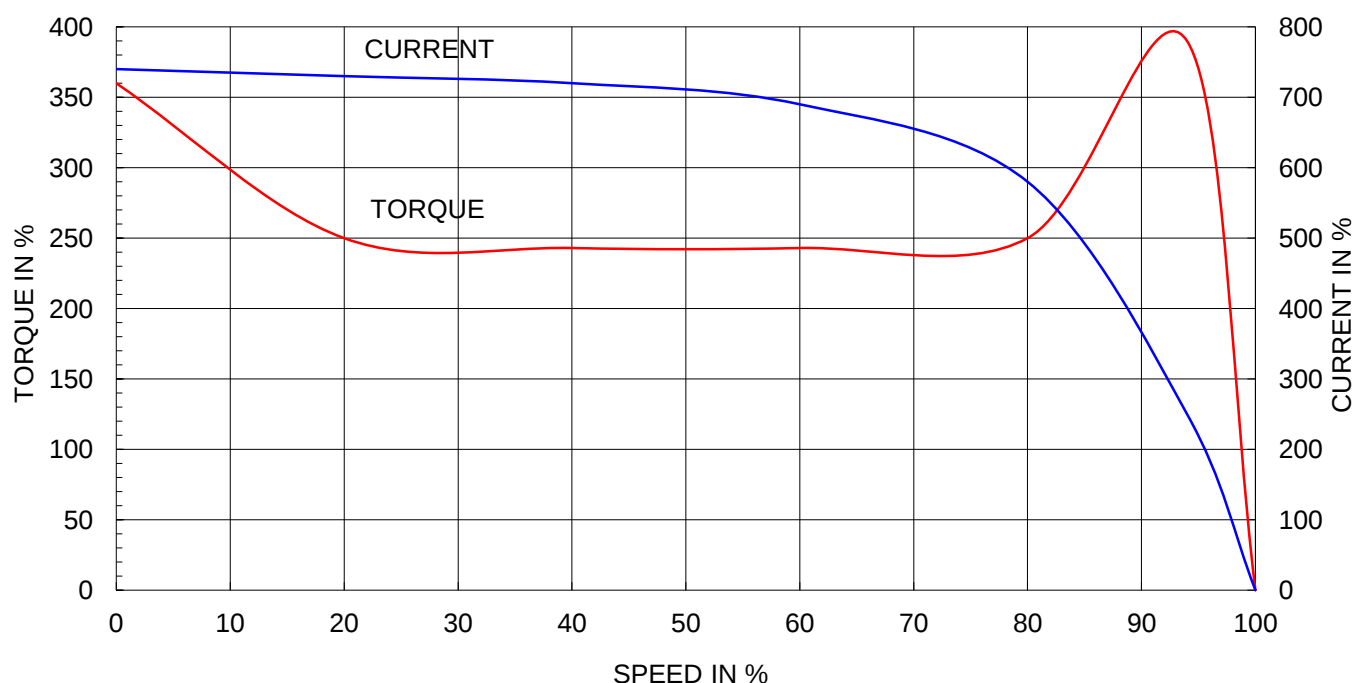

OUTPUT VS EFF., P.F & CURRENT CURVE

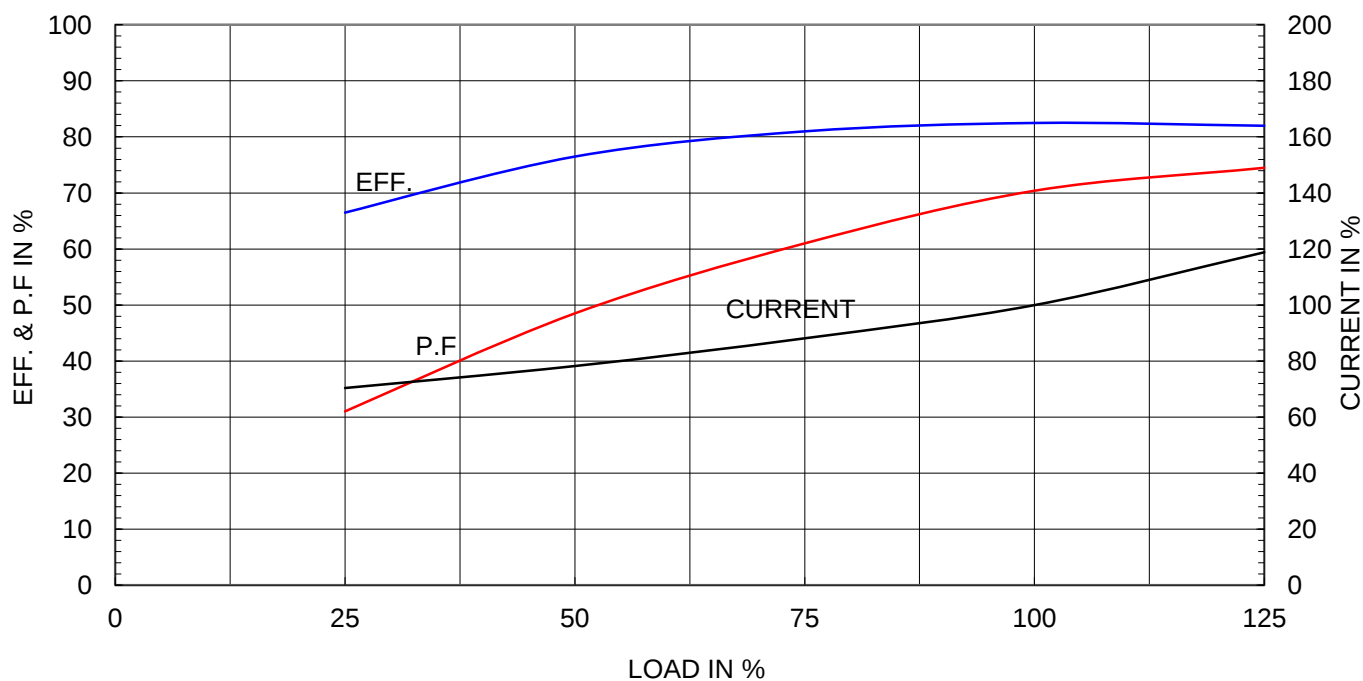

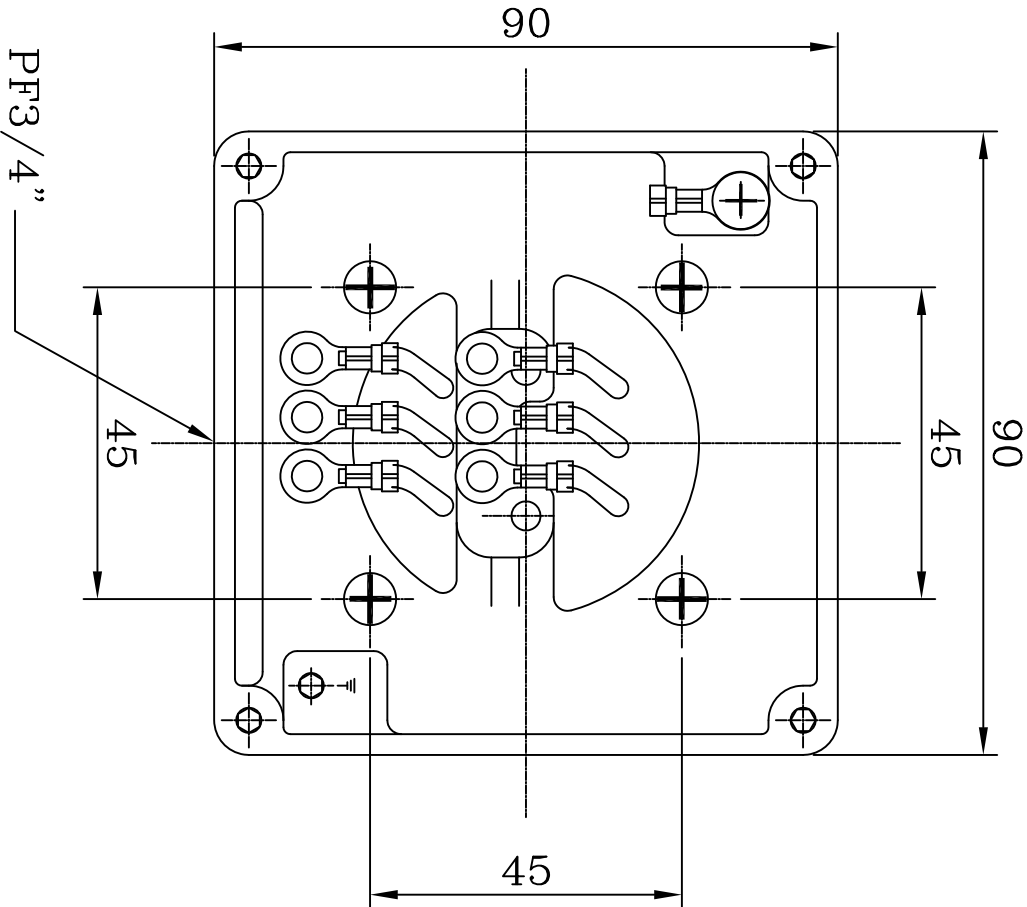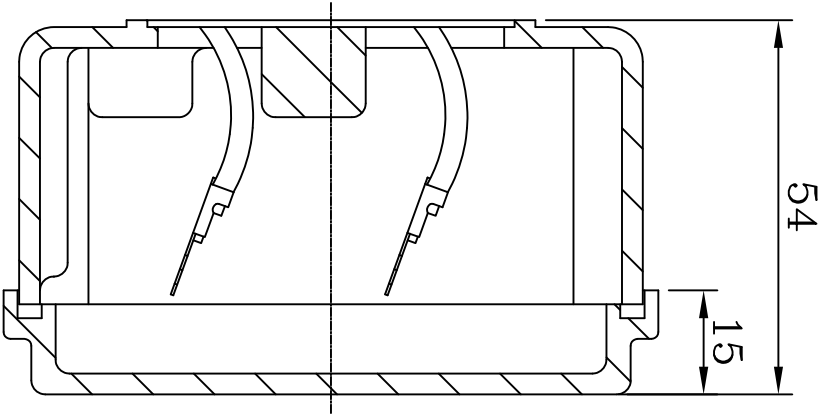

QTY		DESCRIPTION		MATERIAL		DIMENSION		WEIGHT		PART NO.		REMARK		NO.	
APPD BY	B. M. YOO	UNIT	MM	SUBJECT		CB ASM (FR71--90)		CAD PROJ FILE		IP95		6 LEADS		TITLE	
CHKD BY	S. W. SEO	SCALE	1/0.98	CHKD BY		J. S. JEONG		PROJECN		3 (3rd Angle)		DSND BY		C. S. KO	
DATE		2005.12.05		REF. NO		227B1537AA1		DWG NO		227B1537AA1		Revision No.		0	
CONDUCT BOX ASSEMBLY		227B1537AA1		Sheet No.		of		Revision No.		0		0		0	