

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	90L		Rated Output	0.75 kW 1 HP			
Type	HS		Number of Poles	6			
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load	1.8 A 2.1 A 3.6 A		
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	600 %	600 % 600 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F			50% Load	77.0 %			
80 deg. C			75% Load	79.5 %			
Motor Location	☒ Indoor ☐ Outdoor		100% Load	80.0 %			
Altitude	Less than 1000 meter		Power Factor(p.u)				
Relative Humidity	Less than 80 %		50% Load	0.471			
Ambient Temp.	40 deg. C (Max.)		75% Load	0.594			
Duty Type	Continuos (S1)		100% Load	0.685			
Service Factor	1.15		Speed at Full Load	1145 r.p.m			
Mounting	☐ B3 ☐ B5 ☐ V1 ☒ B3/B5		Torque				
Bearing	Type	Anti-Friction	Full Load	0.6 kg·m			
	DE/N-DE	6205ZZ / 6204ZZ	Locked-rotor**	280 %			
	Lubricant	Grease(SML4)	Breakdown**	330 %			
External Thrust	Not applicable		Moment of Inertia (J)				
Coupling Method	☒ Direct ☐ V-Belt		Load(Max.)	2.000 kg·m²			
Shaft Extension	☒ Single ☐ Double		Motor	0.003 kg·m²			
Terminal	Main	☐ Steel ☒ Cast Iron	Sound Pressure Level (No-load & mean value at 1m from motor)	55 dB(A)			
Box	Aux.	☐ Yes ☒ No	Vibration	1.6 mm/sec (r.m.s)			
	Location	Refer to Outline Drawing	Permissible number of consecutive starts	Cold	3 times		
Application			Hot	2 times			
Area classification	Non-Hazardous		Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		
Type of Ex-Protection	Not applicable		SUBMITTAL DRAWING				
Applicable Standard	KS,IEC,NEMA MG1 Part30(Vpeak)		Outline Dimension Drawing \ Motor Weight(Approx.)				
ACCESSORIES			B3		kg		
			B5		kg		
			V1		kg		
			B3/B5	227B5024TA03	21 kg		
			Main T-Box Ass'y	227B1537AA			
SPARE PARTS			REMARK				
			High Efficiency				
			* For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests.


** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.

HHI W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type	:	HS
Full Load Torque	:	0.6 Kg.m
Motor moment of Inertia (J)	:	0.003 Kg.m ²
Load moment of Inertia (J)	:	2.000 Kg.m ²



0.75 kW		6 P		60 Hz	
Speed at Full Load :				1145 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	1.8A	2.1A	3.6A		

SPEED VS TORQUE & CURRENT CURVE

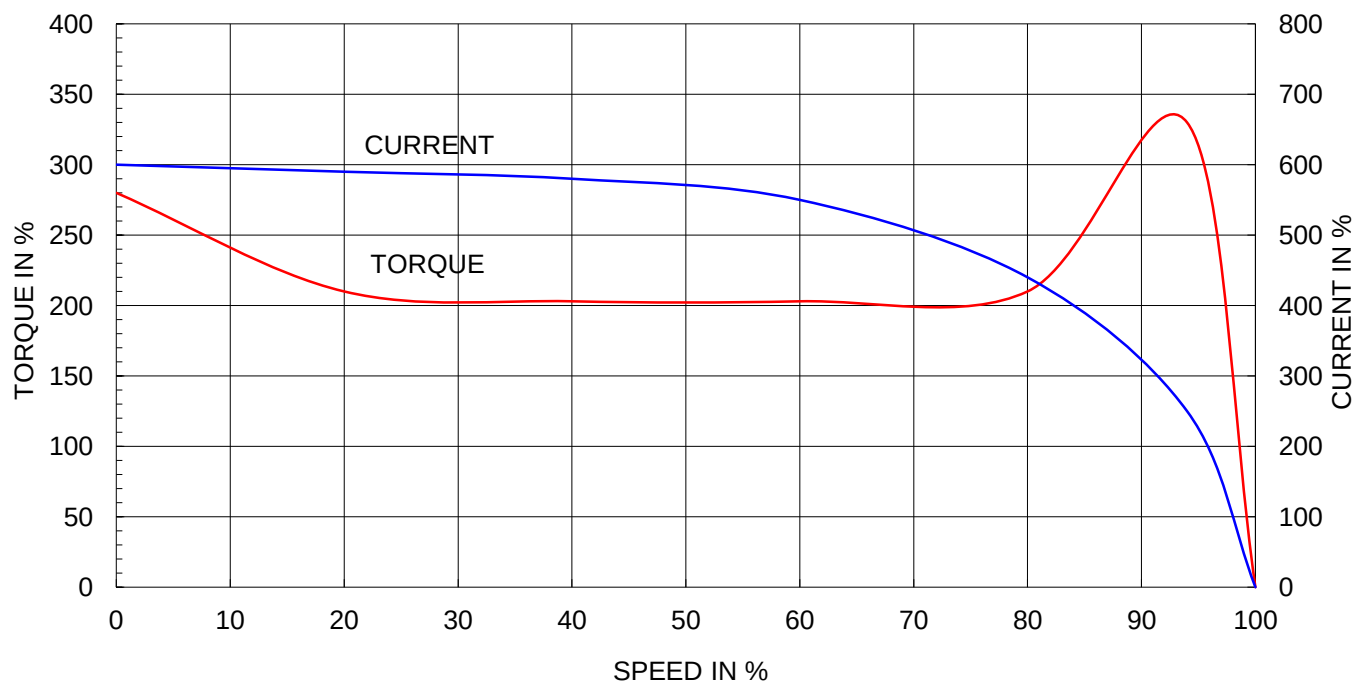

OUTPUT VS EFF., P.F & CURRENT CURVE

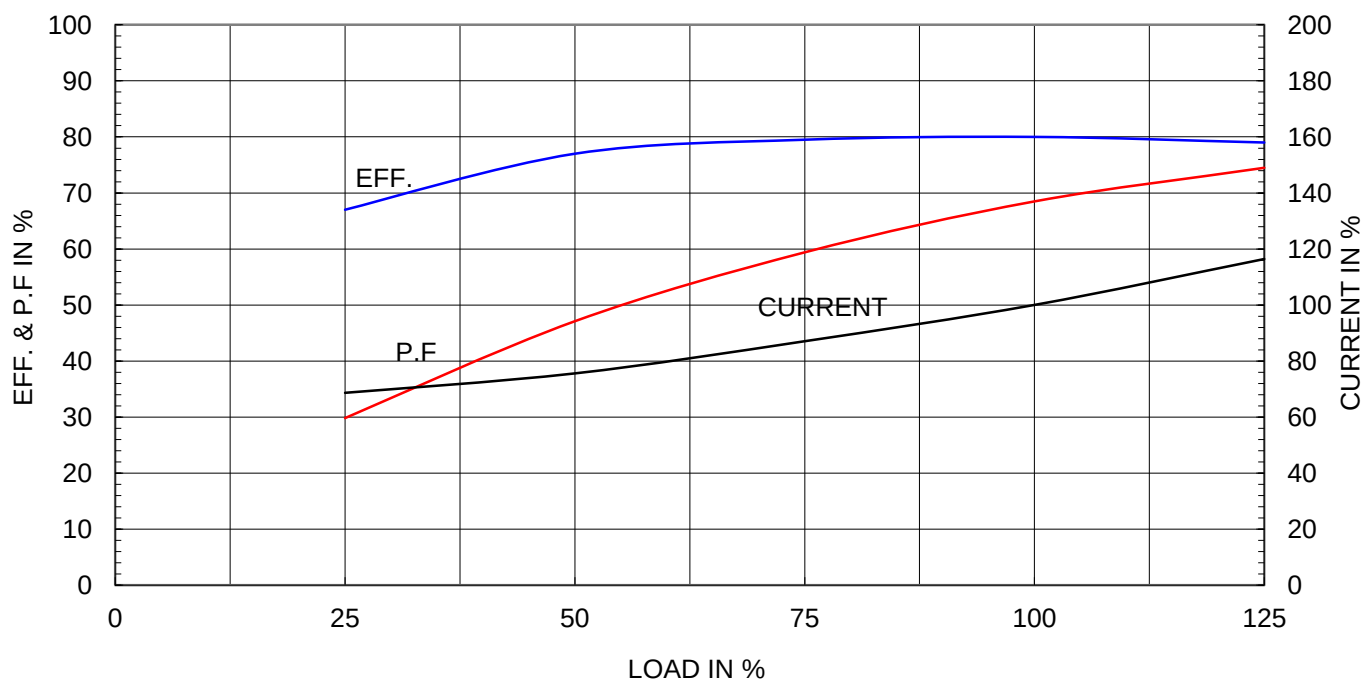

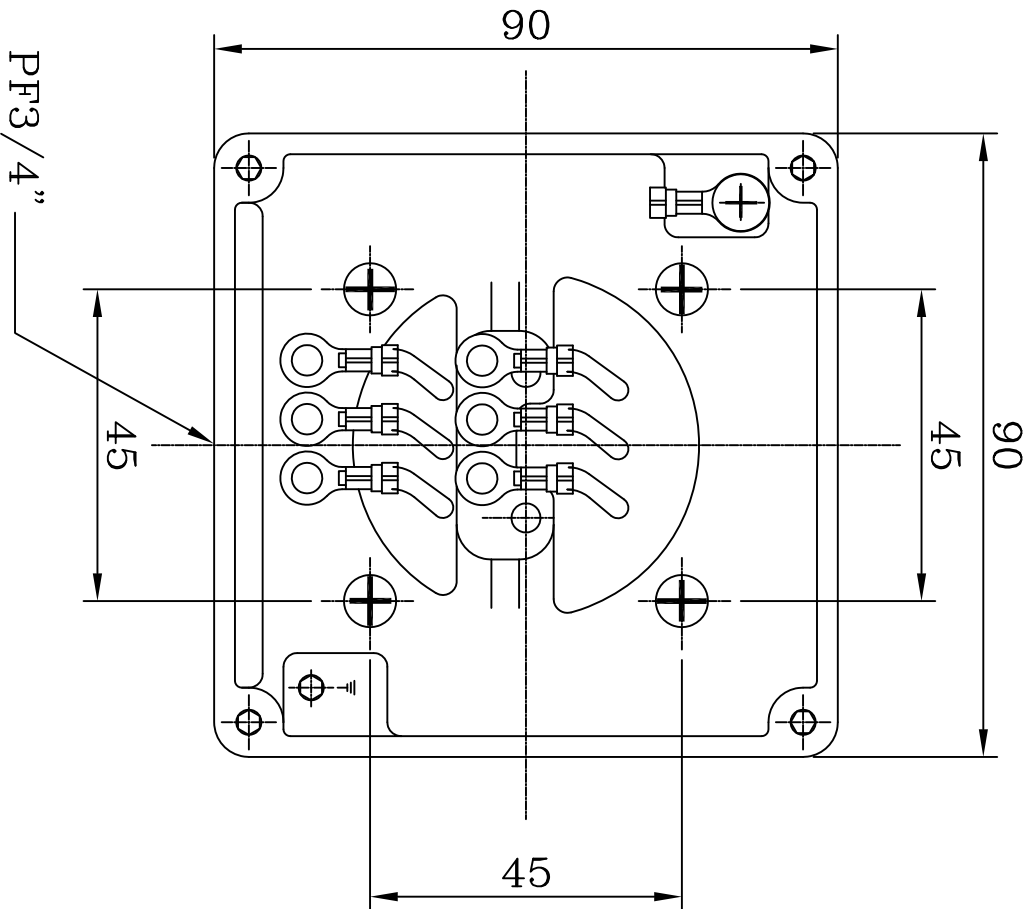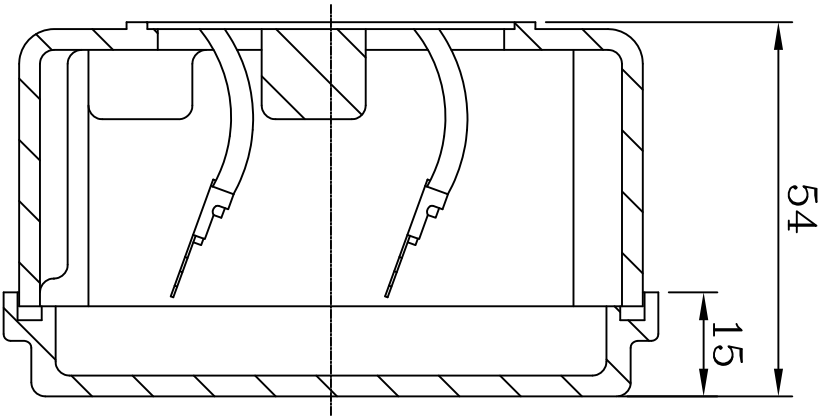

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APP'D BY
1						
2						
3						
4						

QTY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	B. M. YOO	UNIT	MM	SUBJECT	CB ASM (FR71--90)	CAD PROJ FILE	IP95
CHKD BY	S. W. SEO	SCALE	1/0.98	TITLE	CONDUIT BOX ASSEMBLY	6 LEADS	
CHKD BY	J. S. JEONG	PROJECN	3 (3rd Angle)	REF. NO	227B1537AA1	Sheet No.	of
DSND BY	C. S. KO	DATE	2005.12.05	DWG NO	227B1537AA1	Revision No.	0