

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]	
Project Name		Project No.		Quantity sets	
GENERAL SPECIFICATION			PERFORMANCE DATA		
Frame Size	200L		Rated Output	37 kW 50 HP	
Type	HS		Number of Poles	4	
Enclosure(Protection)	Totally Enclosed (IP55)		Rotor Type	Squirrel Cage	
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ	
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V
Number of Phases	3		Current	Full Load	62.1 A 72.0 A 124.3 A
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	670 %	670 % 670 %
Temp. Rise at full load (by resistance method)			Efficiency		
at 1.0 S.F 80 deg. C			50% Load 92.5 %		
Motor Location	☒ Indoor ☐ Outdoor		75% Load 93.2 %		
Altitude	Less than 1000 meter		100% Load 93.0 %		
Relative Humidity	Less than 80 %		Power Factor(p.u)		
Ambient Temp.	40 deg. C (Max.)		50% Load 0.730		
Duty Type	Continuos (S1)		75% Load 0.795		
Service Factor	1.15		100% Load 0.840		
Mounting	☐ B3 ☒ B5 ☐ V1 ☐ B3/B5		Speed at Full Load 1780 r.p.m		
Bearing	Type	Anti-Friction	Torque		
	DE/N-DE	6313ZC3 / 6211ZC3	Full Load 20.2 kg·m		
	Lubricant	Grease(Gadus S2 V100 2)	Locked-rotor** 150 %		
External Thrust	Not applicable		Breakdown** 220 %		
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)		
Shaft Extension	☒ Single ☐ Double		Load(Max.) 24.000 kg·m²		
Terminal	Main	☐ Steel ☒ Cast Iron	Motor 0.280 kg·m²		
Box	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)		
	Location	Refer to Outline Drawing	77 dB(A)		
Application			Vibration 2.2 mm/sec (r.m.s)		
Area classification	Non-Hazardous		Permissible number of		
Type of Ex-Protection	Not applicable		Cold 3 times		
Applicable Standard	KS,IEC,NEMA MG1 Part30(Vpeak)		Hot 2 times		
			Paint	Munsell No.	4.0PB5.4/5.5(VL-451)
ACCESSORIES			SUBMITTAL DRAWING		
			Outline Dimension Drawing \ Motor Weight(Approx.)		
			B3		kg
			B5	227B1931CB02	327 kg
			V1		kg
			B3/B5		kg
			Main T-Box Ass'y 227B8003CB5		
SPARE PARTS			REMARK High Efficiency		
			* For use on PWM VFD 10:1VT, 3:1CT@1.0S.F&F Temp. rise		
			Date	DSND	CHKD
			2011-04-14	W.H.BACK	S. J. RA
					CHKD
					APPD
					J. H. KIM


Note: Others not mentioned in this data sheet shall be in accordance with maker standard.
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
 Inspection and performance test shall be maker standard, if not mentioned.
 * In case of Inverter-Fed Motor, performance data is based on sine wave tests.
 ** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.

HHI W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type	:	HS
Full Load Torque	:	20.2 Kg.m
Motor moment of Inertia (J)	:	0.280 Kg.m ²
Load moment of Inertia (J)	:	24.000 Kg.m ²

37 kW		4 P		60 Hz	
Speed at Full Load :				1780 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	62.1A	72.0A	124.3A		

SPEED VS TORQUE & CURRENT CURVE

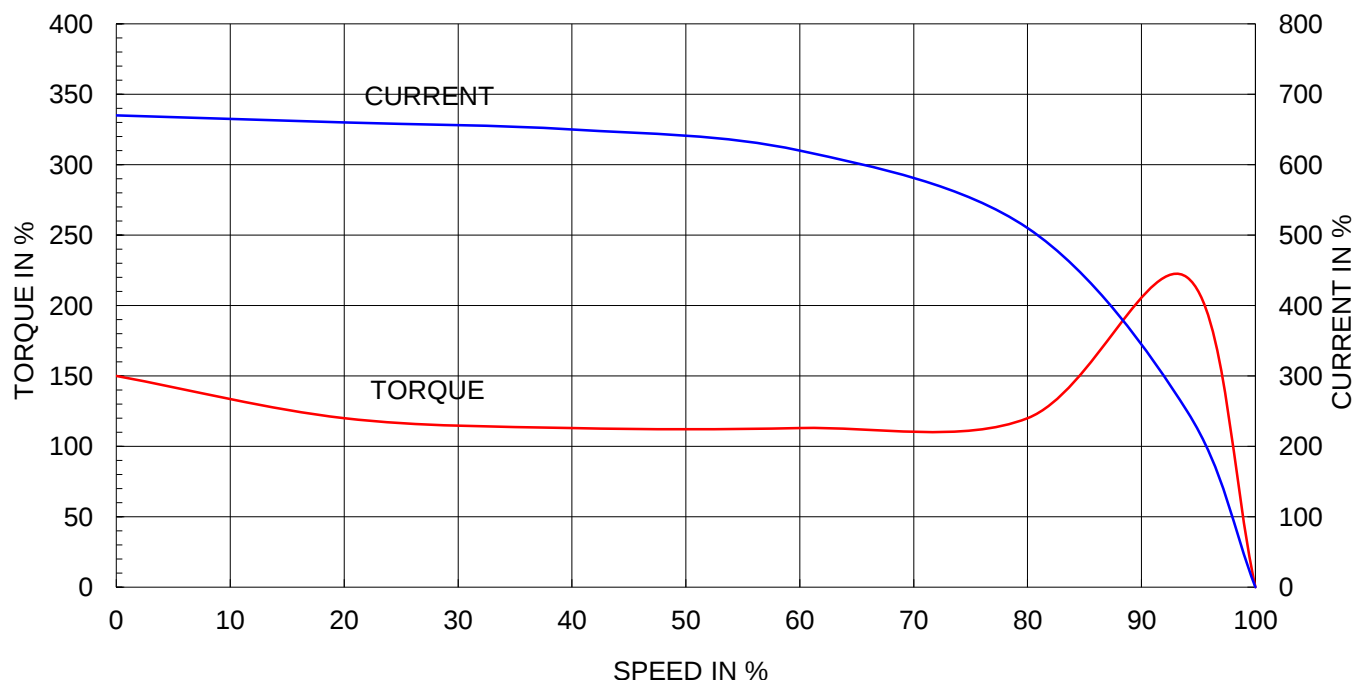

OUTPUT VS EFF., P.F & CURRENT CURVE

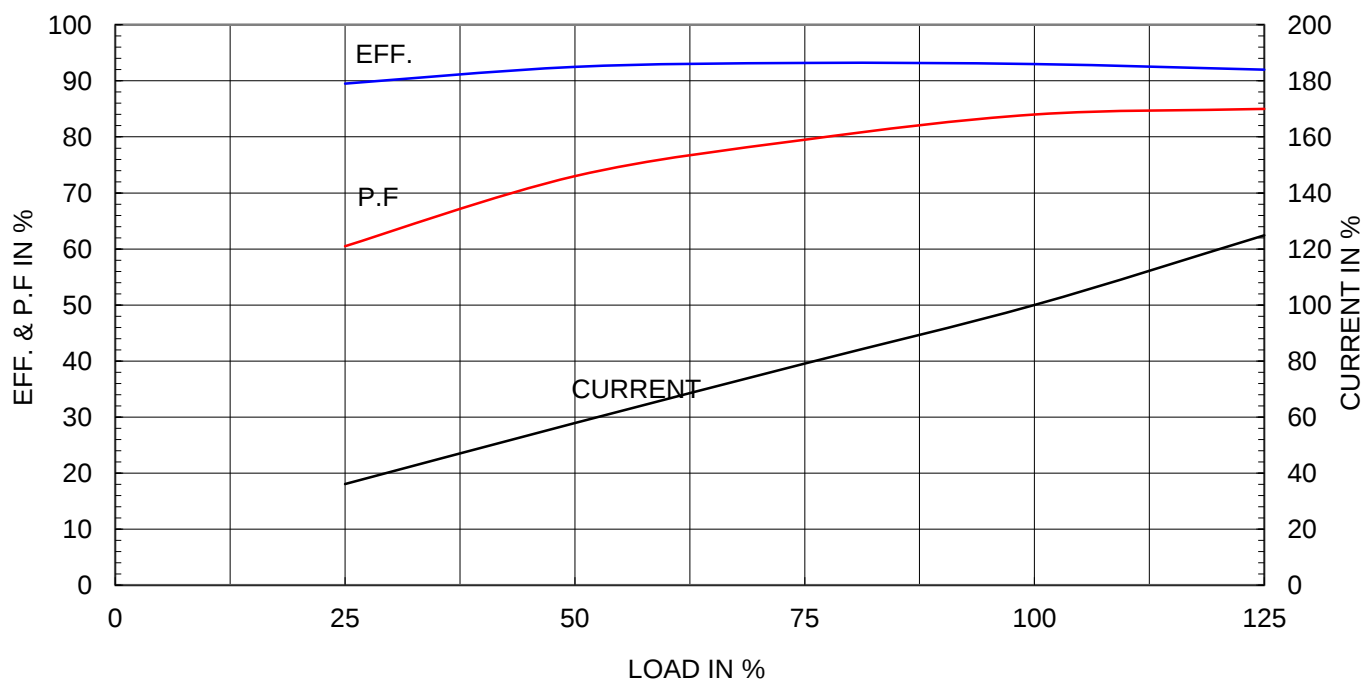




TEFC

THREE PHASE INDUCTION MOTOR

TYPE

HL, HS


CAST IRON FRAME

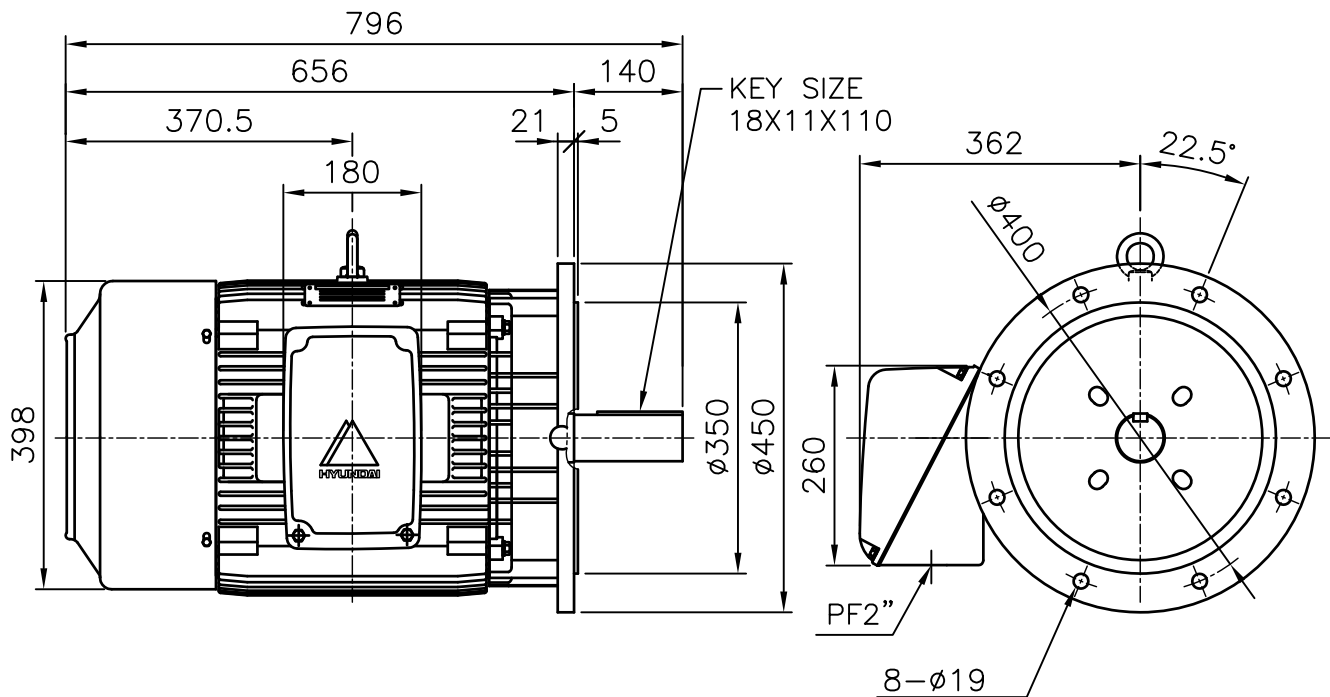

NOTE


1.TOLERANCE :


FLANGE HOLES	$\phi 19^{+0.43}_{-0}$
RABBET DIAMETER	$\phi 350^{+0.016}_{-0.013}$
SHAFT DIAMETER	$\phi 60^{+0.030}_{+0.011}$
KEYWAY WIDTH	$18^{+0}_{-0.043}$
KEYWAY DEPTH	$53^{+0}_{-0.2}$



*CAST IRON CONDUIT BOX

APPD BY	J. H. KIM	UNIT	mm	SUBJECT	KS 200L 4,6P	CAD PROJ \ FILE
CHKD BY	K. S. LEE	SCALE	1/10	TITLE	OUTLINE	XSDNKS\B2020AB10
CHKD BY	I. K. KIM	PROJEC'N	3rd Angle	REF. NO	B2020AB10	Sheet No. of
DSND BY	S. M. KIM	DATE	2002.11.29	DWG NO	227B2020AB10	Revision No. 0



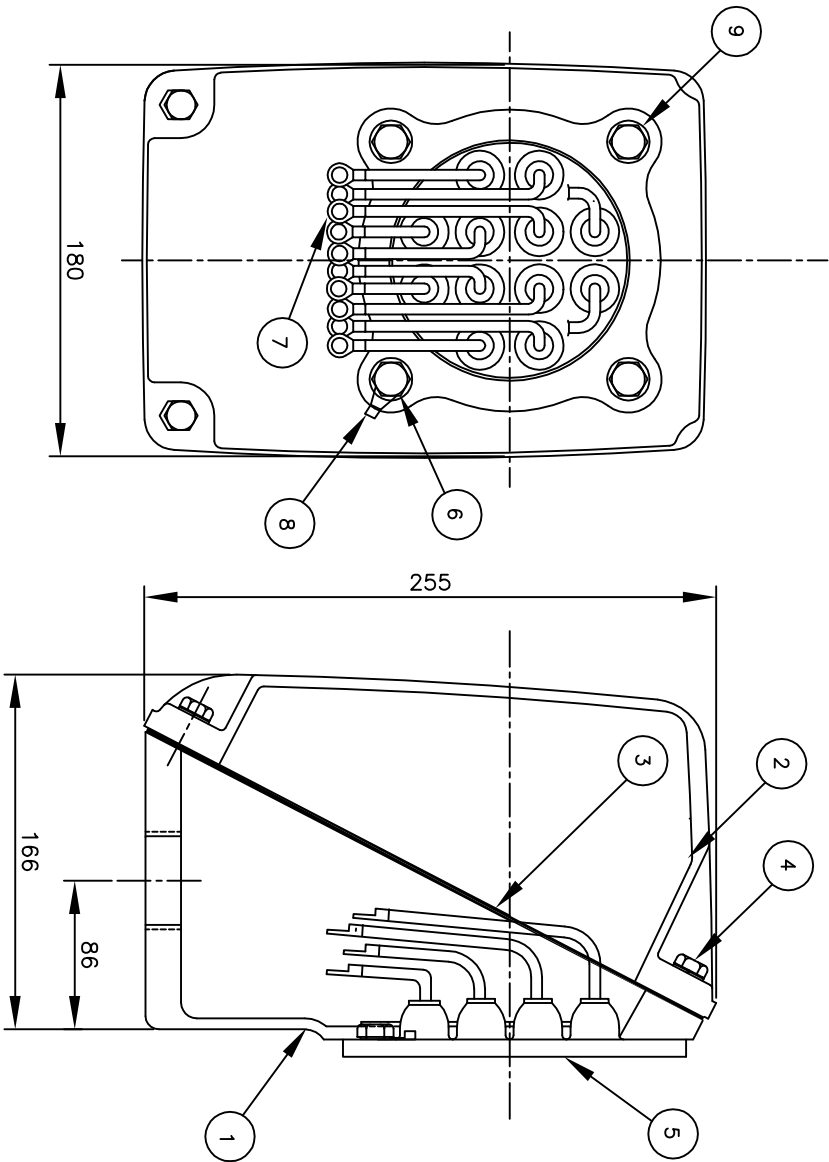

PT	DESCRIPTION	MATERIAL	DIMENSION	Q.TY
1	CONDUIT BOX	FC20		1
2	C/B COVER	FC20		1
3	GASKET(COVER)	N.B.R	T2X170X210	1
4	SCREW(COVER)	S45C	M8XL20	4
5	GASKET(C/B)	N.B.R		1
6	SCREW(C/B)	S45C	M8XL20	4
7	TERMINAL LUG	CU	T1.6	
8	TERMINAL GROUND	CU	T1.6	1
9	WASHER	S45C	M8 X L10	4

Q'TY	DESCRIPTION	MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD	BY KIM JIN HONG	UNIT	MM				
CHKD	BY KIM YU SUNG	SCALE	1/2				
CHKD	BY GO SECK HAN	PROJEC'T	3 [2]1q12L(3rd				
DSND	BY LEE KWANG SOO	DATE	94.12.20				
				REF. NO	B8003CB5	Sheet No.	of
				DWG NO	227B8003CB5	Revision No.	0



HYUNDAI
HEAVY INDUSTRIES CO., LTD.
& POWER SYSTEMS

TITLE
CONDUIT BOX
& COVER ASS'Y

Cad Prod. Type \ FILE
XSMOUTV\B8003CB4