

Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR



Contents


1 . Data Sheet of AC Induction Motor	- 1Sheets
2 . Speed-Torque & Current Curve	- 1Sheets
3 . Outline Dimension Drawing	- 1Sheets
4 . Main Terminal Box Drawing	- 1Sheets

		AC INDUCTION MOTOR DATA SHEET									
Model No.or RFQ No.		2206KSTD40SSDS1STFE3B51DL0SDS		Item No.				Rev. No.		[]	
Project Name				Project No.				Quantity			
GENERAL SPECIFICATION				PERFORMANCE DATA							
Frame Size		80M		Rated Output		0.75 kW		1 HP			
Type		HLP-0.75/2		Number of Poles		2					
Enclosure(Protection)		Totally Enclosed (IP55)		Rotor Type		Squirrel Cage					
Method of Cooling		IC411(FC)		Starting Method*		☒ D.O.L ☐ Y-Δ					
Rated Frequency		60 Hz		Rated Voltage		220 V					
Number of Phases		3		Current		Full Load		3.1 A			
Insulation Class		☒ F ☐ B ☐ H				Locked-rotor**		900 %			
Temp. Rise at full load (by resistance method)				Efficiency							
at 1.0 S.F		80 deg. C				50% Load		73.5 %			
Motor Location		☒ Indoor ☐ Outdoor				75% Load		77.2 %			
Altitude		Less than 1000				100% Load		77.0 %			
Relative Humidity		Less than 80 %		Power Factor(p.u)							
Ambient Temp.		40 deg. C (Max.)				50% Load		0.610			
Duty Type		Continuous(S1)				75% Load		0.740			
Service Factor		1.15				100% Load		0.820			
Mounting		☐ B3 ☒ B5 ☐ V1 ☐ B3/B5		Speed at Full Load		3500 r.p.m					
Bearing		Type		Anti-Friction		Torque					
		DE/N-DE		6204ZZ / 6203ZZ		Full Load		0.2 kg·m			
		Lubricant		Grease(HIFLEX L-3)		Locked-rotor**		240 %			
External Thrust		Not applicable				Breakdown**		300 %			
Coupling Method		☒ Direct ☐ V-Belt		Moment of Inertia (J)							
Shaft Extension		☒ Single ☐ Double				Load(Max.)		0.150 kg·m²			
Terminal Box		Main		☐ Steel ☒ Cast Iron		Motor		0.001 kg·m²			
		Aux.		☐ Yes ☒ No							
		Location		Refer to Outline Drawing							
Application				Vibration		1.6 mm/sec (r.m.s)					
Area classification		Not applicable		Permissible number of consecutive starts		Cold 3 times					
Type of Ex-Protection		Non-Hazardous				Hot 2 times					
Applicable Standard		KS, IEC, NEMA MG1 Part30(Vpeak)		Paint		Munsell No.		4.4PB5.5/5.6(VL-451)			
ACCESSORIES				SUBMITTAL DRAWING							
				Outline Dimension Drawing		\		Motor Weight(Approx.)			
				B5		LM-A1080B5P1001		14 kg			
				Main T-Box Ass'y		3M-148548					
				REMARK							
				*.Premium Efficiency(IE3)							
				*.For use on PWM VFD 10:1VT,3:1CT@1.0S.F&F Temp.rise							
SPARE PARTS				Date		DSND		CHKD		CHKD	
				2018-04-25		R.G. KIM		-		O.J. KIM	
										S.K. HAN	
Note: Others not mentioned in this data sheet shall be in accordance with maker standard. Above technical data are only design values and shall be guaranteed with tolerance of applicable standard. Inspection and performance test shall be maker standard, if not mentioned. * In case of Inverter-Fed Motor, performance data is based on sine wave tests. ** The data are based on rated voltage & frequency, and data are expressed as a percentage of full load value.											


Type :	HLP-0.75/2	
Full Load Torque :	0.2	kg.m
Motor moment of Inertia (J) :	0.001	kg.m ²
Load moment of Inertia (J) :	0.150	kg.m ²

0.75 kW	2 P	60 Hz
Speed at Full Load : 3500 RPM		
Rated Voltage	220V	
Full Load Current	3.1A	

SPEED VS TORQUE & CURRENT CURVE

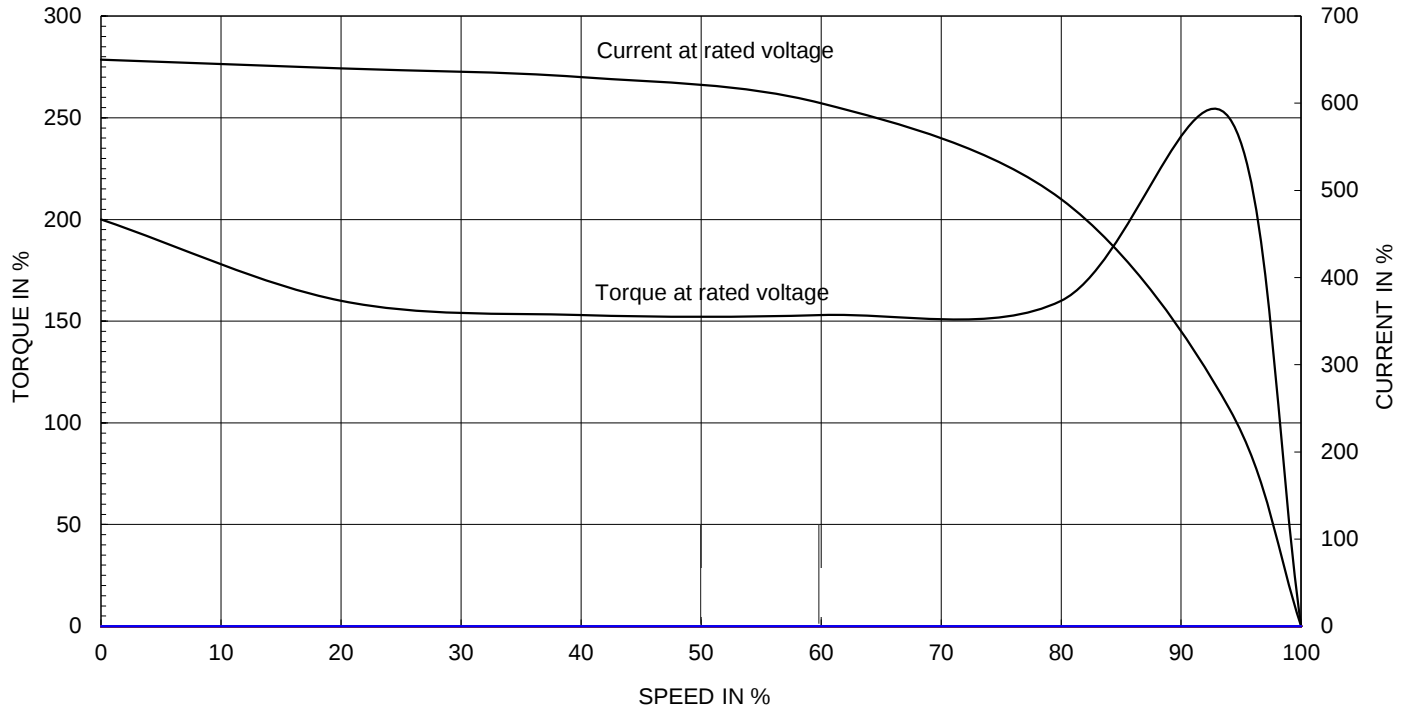


OUTPUT VS EFF., P.F & CURRENT CURVE

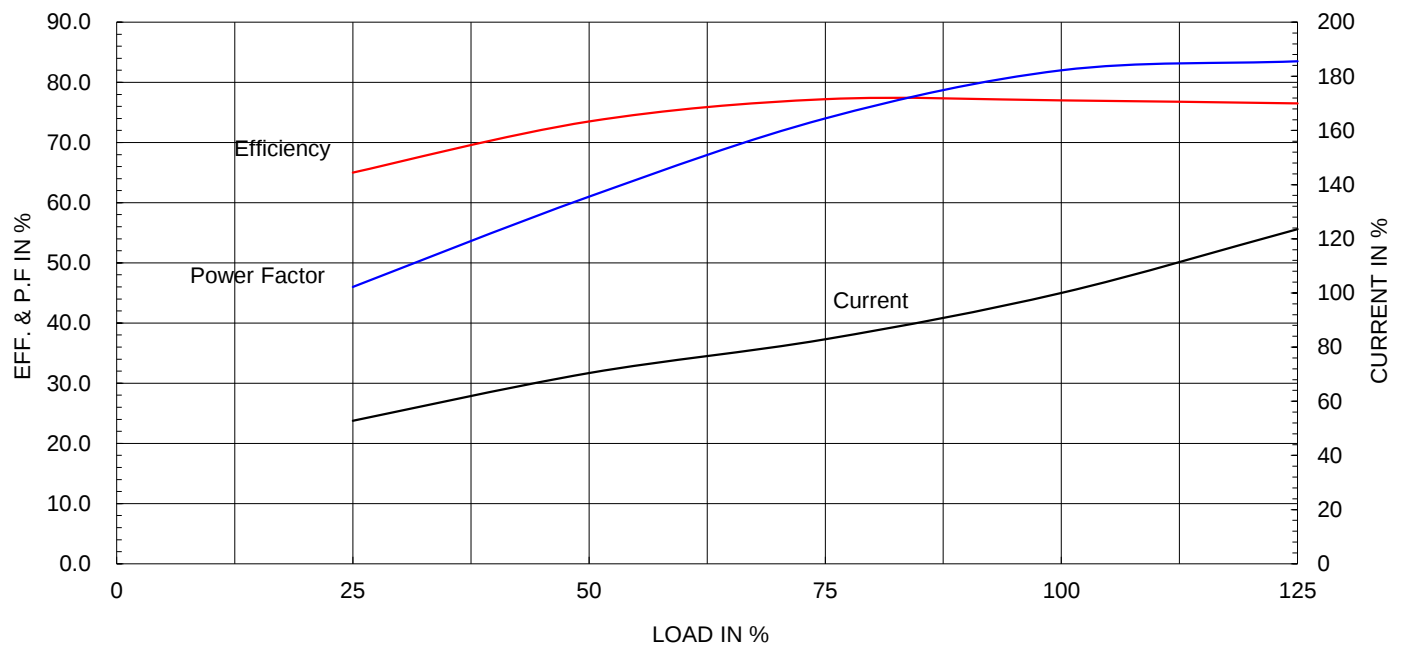

1	2	3	4
▽	50S	REV	DATE
▽▽	12.5S		
▽▽▽	3.2S		
▽▽▽▽	0.4S		

REVD BY	CHKD BY	CHKD BY	APPD BY
---------	---------	---------	---------

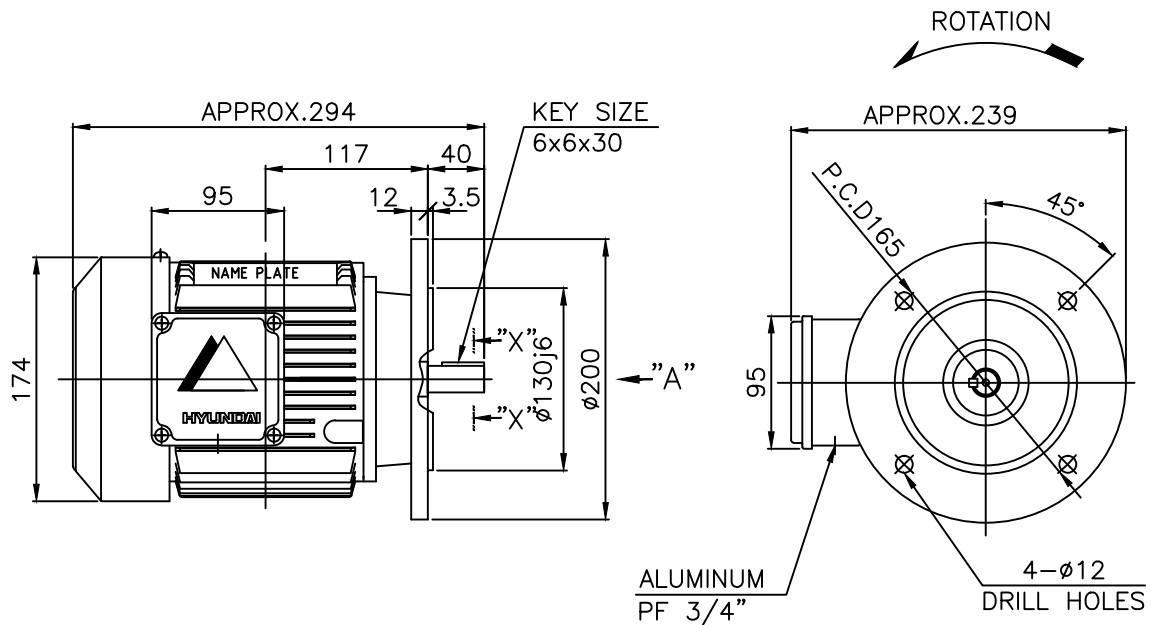


VIEW "A"

NOTE

1.TOLERANCE :

FLANGE HOLES	$\phi 12$	$+0.43$ 0
RABBET DIAMETER	$\phi 130$	$+0.014$ -0.011
SHAFT DIAMETER	$\phi 19$	$+0.009$ -0.004
KEYWAY WIDTH	6	0 -0.030
KEYWAY DEPTH	3.5	$+0.1$ 0
KEY WIDTH	6	0 -0.030
KEY HEIGHT	6	0 -0.030

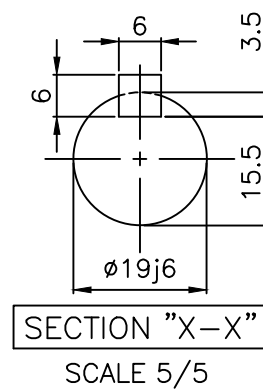

APPD BY	S.K.HAN	UNIT	mm	SUBJECT	KS, IEC Fr.80M	DWG SIZE
CHKD BY	S.Y.KIM	SCALE	1/5			A4 (1:5)
CHKD BY	R.G.KIM	PROJEC'N	3각법 (3rd Angle)	TITLE	OUTLINE	
DSND BY	S.H.YUN	DATE	2018-07-27	REF. NO		Sheet No. of
				DWG NO	LM-A1080B5P1001	Revision No. 0

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급주의)

HYUNDAI
ELECTRIC



SEC. "A" - "A"

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY	일반가공공차				일반재관공차			
							1-4	±0.1	6-30	±0.5	4-18	±0.2	30-120	±0.8
							18-63	±0.3	120-315	±1.2				
							63-250	±0.5	315-1000	±2.0				
							250-	±0.8	1000-	±3.0				

Q'TY	DESCRIPTION		MATERIAL	DIMENSION		WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.K.HAN		UNIT	mm		SUBJECT	FR.71~90 (AL)		DWG SIZE
CHKD BY	S.Y.KIM		SCALE	1/1			TITLE Terminal Box Arrangement		A3 (1:1)
CHKD BY	R.G.KIM		PROJEC'N	3각법 (3rd Angle)					
DSND BY	이혜경 R		DATE	2011-10-26					
						REF. NO	227B1537AA		Sheet No. of
						DWG NO	3M-148548		Revision No. 2
6			7			8		9	