


Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR

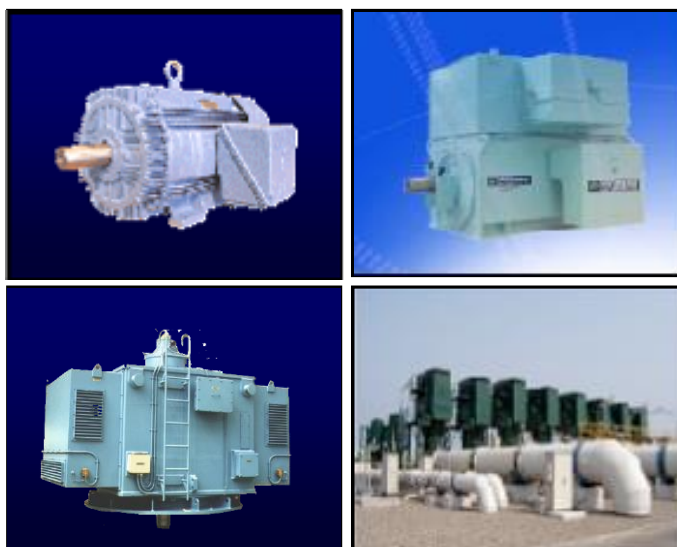

Contents

1 . Data Sheet of AC Induction Motor	- 1Sheets
2 . Speed-Torque & Current Curve	- 1Sheets
3 . Outline Dimension Drawing	- 1Sheets
4 . Main Terminal Box Drawing	- 1Sheets

		AC INDUCTION MOTOR DATA SHEET											
Model No.or RFQ No.		4406KSTD40SSDS1STFE3351DL0SDS		Item No.		Rev. No.		[]					
Project Name				Project No.		Quantity							
GENERAL SPECIFICATION				PERFORMANCE DATA									
Frame Size		90L		Rated Output		0.75 kW		1 HP					
Type		HLP-0.75/6		Number of Poles		6							
Enclosure(Protection)		Totally Enclosed (IP55)		Rotor Type		Squirrel Cage							
Method of Cooling		IC411(FC)		Starting Method*		☒ D.O.L ☐ Y-Δ							
Rated Frequency		60 Hz		Rated Voltage		440 V							
Number of Phases		3		Current		Full Load		2.0 A					
Insulation Class		☒ F ☐ B ☐ H				Locked-rotor**		600 %					
Temp. Rise at full load (by resistance method)				Efficiency									
at 1.0 S.F		80 deg. C				50% Load		79.0 %					
Motor Location		☒ Indoor ☐ Outdoor				75% Load		82.7 %					
Altitude		Less than 1000				100% Load		82.5 %					
Relative Humidity		Less than 80 %		Power Factor(p.u)									
Ambient Temp.		40 deg. C (Max.)				50% Load		0.390					
Duty Type		Continuous(S1)				75% Load		0.530					
Service Factor		1.15				100% Load		0.596					
Mounting		☐ B3 ☐ B5 ☐ V1 ☒ B3/B5		Speed at Full Load		1140 r.p.m							
Bearing	Type	Anti-Friction		Torque									
	DE/N-DE	6205ZZ / 6204ZZ				Full Load		0.6 kg·m					
	Lubricant	Grease(HIFLEX L-3)				Locked-rotor**		250 %					
External Thrust		Not applicable				Breakdown**		260 %					
Coupling Method		☒ Direct ☐ V-Belt		Moment of Inertia (J)									
Shaft Extension		☒ Single ☐ Double				Load(Max.)		2.000 kg·m²					
Terminal Box	Main	☐ Steel ☒ Cast Iron				Motor		0.003 kg·m²					
	Aux.	☐ Yes ☒ No		Sound Pressure Level (No-load & mean value at 1m from motor)									
	Location	Refer to Outline Drawing				55 dB(A)							
Application				Vibration		1.6 mm/sec (r.m.s)							
Area classification		Not applicable		Permissible number of consecutive starts		Cold		3 times					
Type of Ex-Protection		Non-Hazardous				Hot		2 times					
Applicable Standard		KS, IEC, NEMA MG1 Part30(Vpeak)		Paint		Munsell No.		4.4PB5.5/5.6(VL-451)					
ACCESSORIES				SUBMITTAL DRAWING									
				Outline Dimension Drawing		\		Motor Weight(Approx.)					
				B3/B5		LM-A1095B4P1001		21 kg					
				Main T-Box Ass'y		3M-148548							
				REMARK									
				*.Premium Efficiency(IE3) *.For use on PWM VFD 10:1VT,3:1CT@1.0S.F&F Temp.rise									
SPARE PARTS													
				Date		DSND		CHKD		CHKD		APPD	
				2018-04-25		R.G. KIM		-		O.J. KIM		S.K. HAN	

Note: Others not mentioned in this data sheet shall be in accordance with maker standard.

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.


* In case of Inverter-Fed Motor, performance data is based on sine wave tests.

** The data are based on rated voltage & frequency, and data are expressed as a percentage of full load value.


Type :	HLP-0.75/6	
Full Load Torque :	0.6	kg.m
Motor moment of Inertia (J) :	0.003	kg.m ²
Load moment of Inertia (J) :	2.000	kg.m ²

0.75 kW	6 P	60 Hz
Speed at Full Load : 1140 RPM		
Rated Voltage	440V	
Full Load Current	2.0A	

SPEED VS TORQUE & CURRENT CURVE

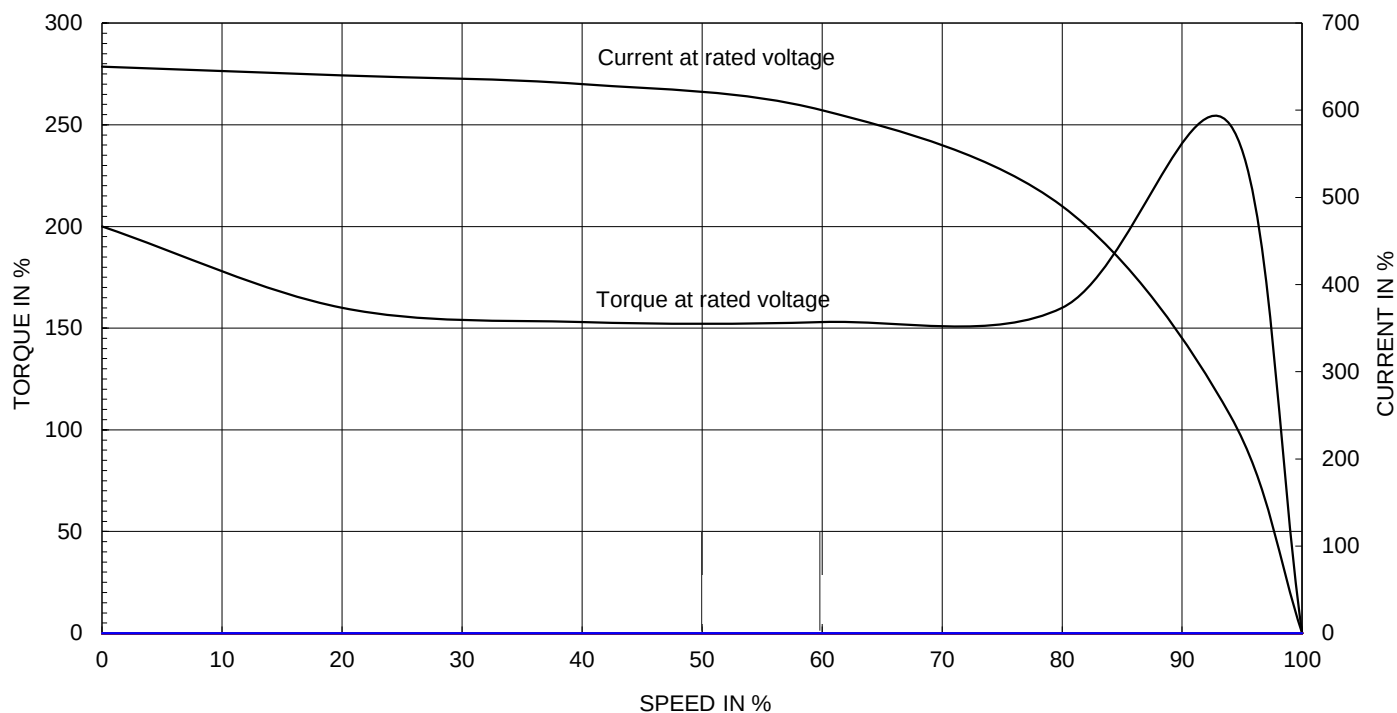

OUTPUT VS EFF., P.F & CURRENT CURVE

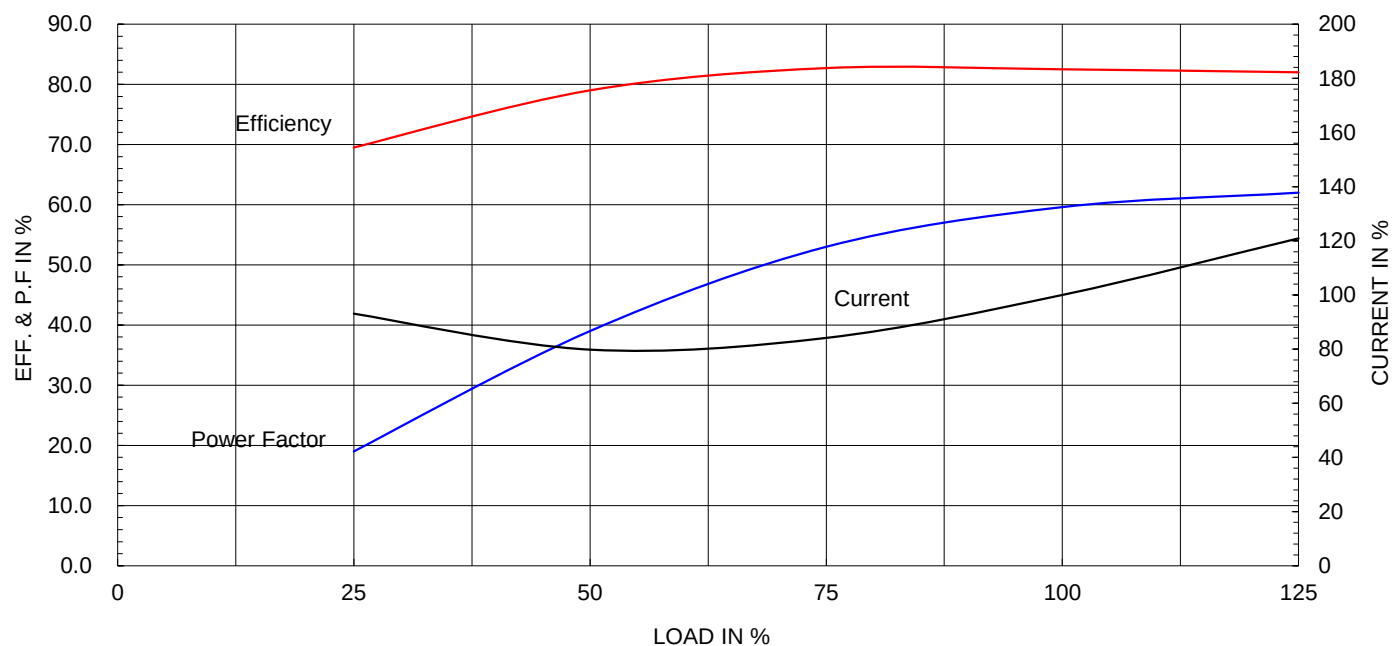


THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급주의)

HYUNDAI
ELECTRIC


1	2	3	4
▽	50S	REV	DATE
▽▽	12.5S		
▽▽▽	3.2S		
▽▽▽▽	0.4S		

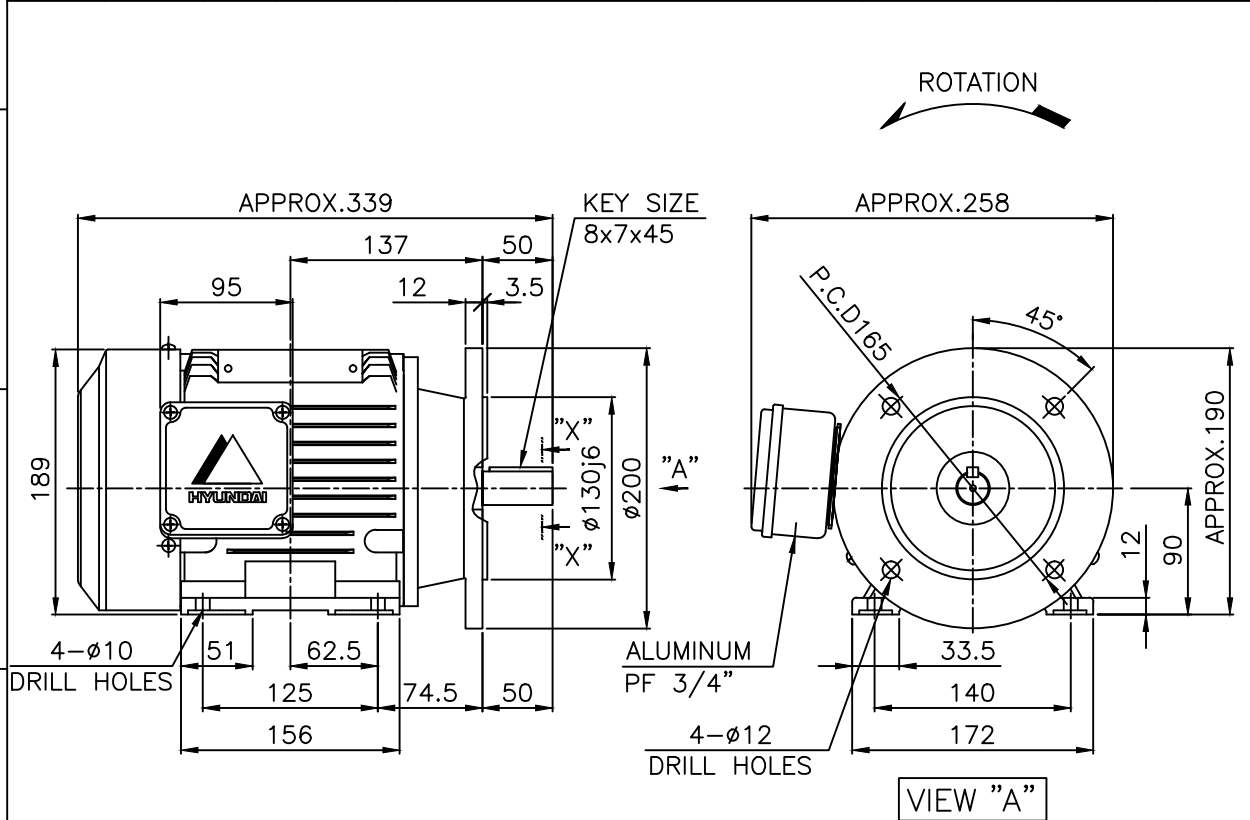

NOTE

1.TOLERANCE :

CENTER HEIGHT	90	$\begin{matrix} 0 \\ -0.5 \end{matrix}$
BASE HOLES	$\phi 10$	$\begin{matrix} +0.36 \\ 0 \end{matrix}$
FLANGE HOLES	$\phi 12$	$\begin{matrix} +0.43 \\ 0 \end{matrix}$
RABBET DIAMETER	$\phi 130$	$\begin{matrix} +0.014 \\ -0.011 \end{matrix}$
SHAFT DIAMETER	$\phi 24$	$\begin{matrix} +0.009 \\ -0.004 \end{matrix}$
KEYWAY WIDTH	8	$\begin{matrix} 0 \\ -0.036 \end{matrix}$
KEYWAY DEPTH	4	$\begin{matrix} +0.2 \\ 0 \end{matrix}$
KEY WIDTH	8	$\begin{matrix} 0 \\ -0.036 \end{matrix}$
KEY HEIGHT	7	$\begin{matrix} 0 \\ -0.090 \end{matrix}$

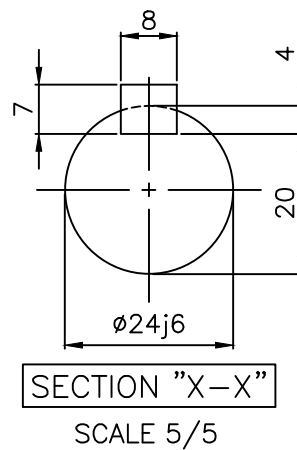



APPD BY	S.K.HAN	UNIT	mm	SUBJECT	KS, IEC Fr.90L	DWG SIZE	A4 (15)
CHKD BY	S.Y.KIM	SCALE	1/5	TITLE	OUTLINE		
CHKD BY	R.G.KIM	PROJEC'N	3각법 (3rd Angle)				
DSND BY	S.H.YUN	DATE	2018-08-13				
				REF. NO		Sheet No.	of
				DWG NO	LM-A1095B4P1001	Revision No.	1

HYUNDAI
ELECTRIC

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급주의)

HYUNDAI
ELECTRIC

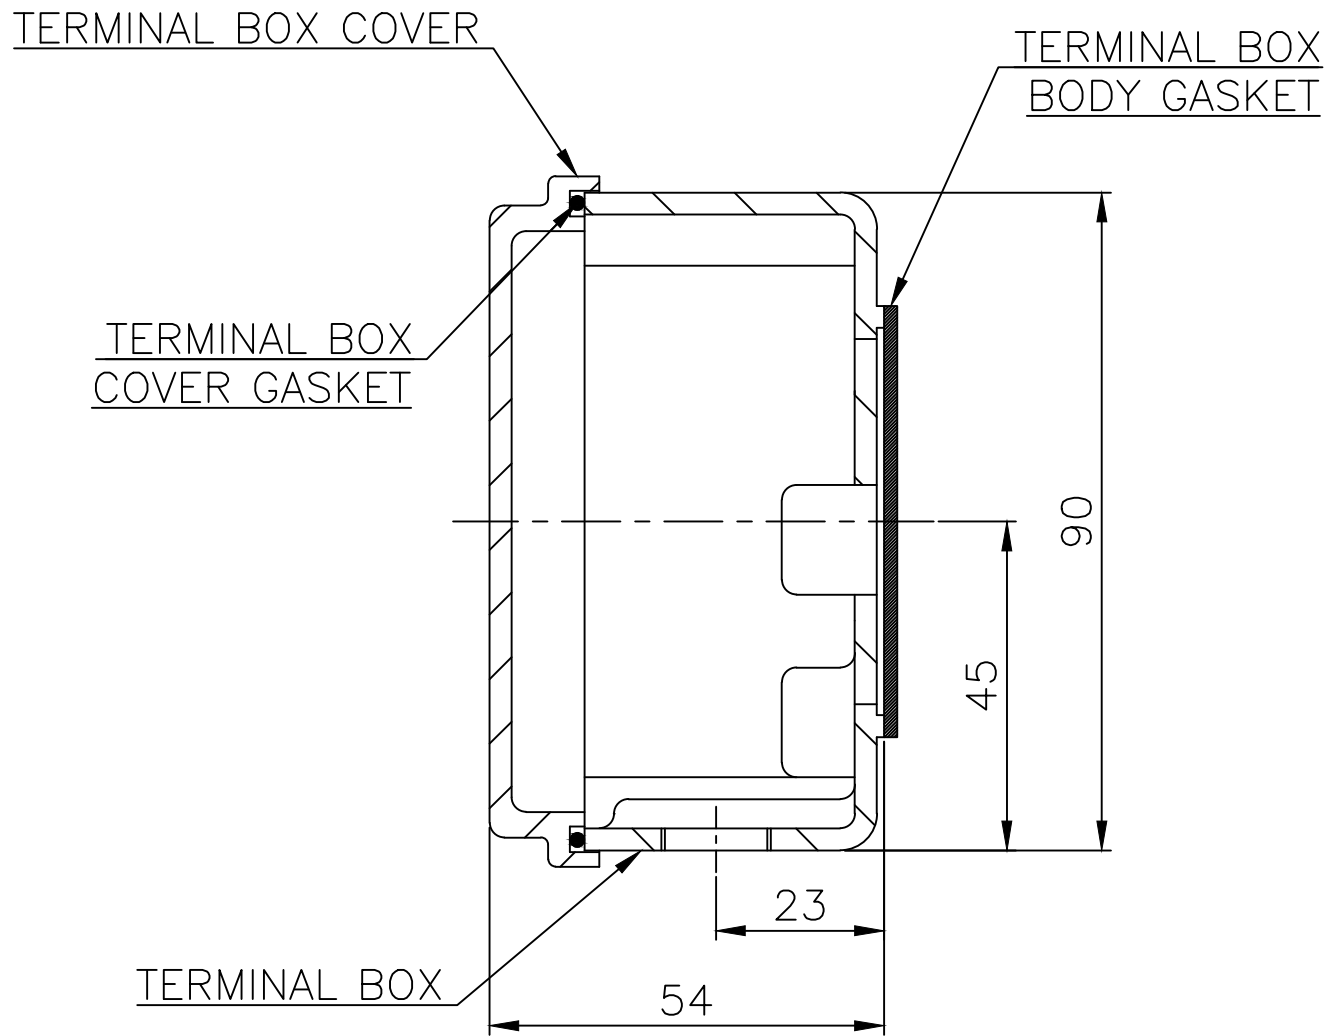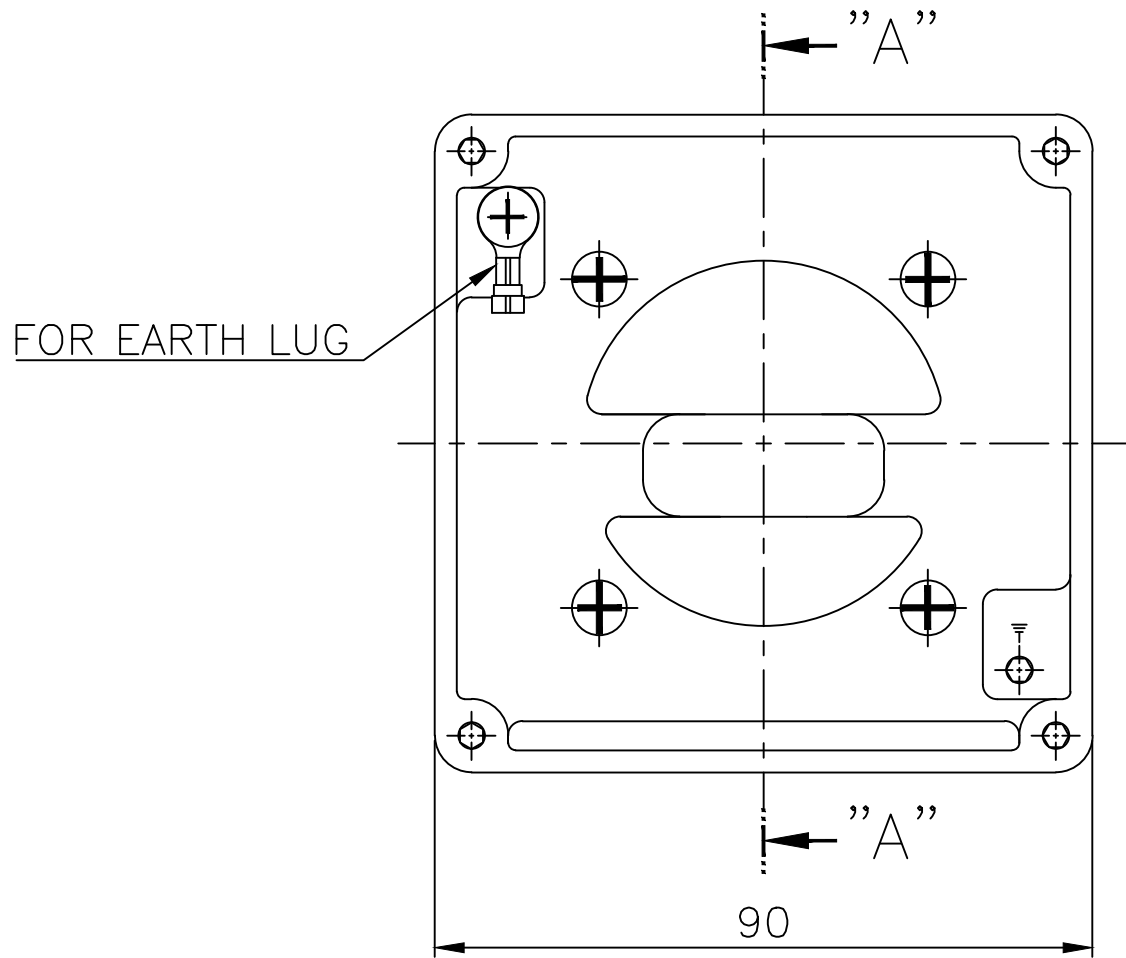

SEC. "A" - "A"

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

일반가공공차		일반재관공차	
1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION		MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.K.HAN		UNIT	mm	SUBJECT	FR.71~90 (AL)		DWG SIZE
CHKD BY	S.Y.KIM		SCALE	1/1				A3 (1:1)
CHKD BY	R.G.KIM		PROJEC'N	3각법(3rd Angle)	TITLE Terminal Box Arrangement			
DSND BY	이혜경 R		DATE	2011-10-26				
					REF. NO	227B1537AA		Sheet No. of
					DWG NO	3M-148548		Revision No. 2