

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No.		[0]			
Project Name		Project No.		Quantity		set			
GENERAL SPECIFICATION				PERFORMANCE DATA					
Frame Size		132S		Rated Output		7.5 kW 10 HP			
Type		HLP-7.5/2		Number of Poles		2			
Enclosure(Protection)		Totally Enclosed (IP55)		Rotor Type		Squirrel Cage			
Method of Cooling		IC411(FC)		Starting Method*		☒ D.O.L ☐ Y-Δ			
Rated Frequency		60 Hz		Rated Voltage		440 V 380 V 220 V			
Number of Phases		3		Current		Full Load 12.5 A 14.5 A 25.1 A			
Insulation Class		☒ F ☐ B ☐ H		Locked-rotor**		860 % 860 % 860 %			
Temp. Rise at full load (by resistance method)				Efficiency					
at 1.0 S.F		80 °C		50% Load		87.8 %			
Motor Location		☒ Indoor ☐ Outdoor		75% Load		89.7 %			
Altitude		Less than 1000m		100% Load		90.2 %			
Relative Humidity		Less than 80 %		Power Factor(p.u)					
Ambient Temp.		40 °C MAX.		50% Load		0.800			
Duty Type		Continuous(S1)		75% Load		0.850			
Service Factor		1.15		100% Load		0.870			
Mounting		☐ B3 ☒ B5 ☐ V1 ☐ B3/B5		Speed at Full Load		3525 r.p.m			
Bearing		Type Anti-Friction		Torque					
		DE/N-DE 6208ZZC3 / 6208ZZC3		Full Load		2.1 kg.m			
		Lubricant Grease(Polyrex-EM)		Locked-rotor**		160 %			
External Thrust		Not applicable		Breakdown**		260 %			
Coupling Method		☒ Direct ☐ V-Belt		Moment of Inertia (J)					
Shaft Extension		☒ Single ☐ Double		Load(Max.)		2.486808511 kg·m²			
Terminal Box		Main ☐ Steel ☒ Cast Iron		Motor		0.019 kg·m²			
		Aux. ☐ Yes ☒ No		Sound Pressure Level (No-load & mean value at 1m from motor)					
		Location Refer to Outline Drawing				68 dB(A)			
Application				Vibration		1.6 mm/sec(r.m.s)			
Area classification		Non-Hazardous		Permissible number of consecutive starts		Cold 3 times			
Type of Ex-Protection		Not applicable				Hot 2 times			
Applicable Standard		KS, IEC, NEMA MG1 Part30(Vpeak)		Paint		Munsell No. Panton279C			
ACCESSORIES				SUBMITTAL DRAWING					
				Outline Dimension Drawing \ Motor Weight(Approx.)					
				B3				kg	
				B5		LM-T1131B3PLV01		68 kg	
				V1				kg	
				B3/B5				kg	
				Main T-Box Ass'y		3M-148549			
				REMARK					
				*.Premium Efficiency(IE3)					
				*.For use on PWM VFD 10:1VT,3:1CT@1.0S.F&F Temp.rise					
SPARE PARTS									
				Date		DSND		CHKD	
				2018-11-23		R.G. KIM		---	

Note: Others not mentioned in this data sheet shall be in accordance with maker standard. Made in Vietnam

Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.

Inspection and performance test shall be maker standard, if not mentioned.

* In case of Inverter-Fed Motor, performance data is based on sine wave tests.


** The data are based on rated voltage & frequency, and data are expressed as a percentage of full load value.

HEES W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type :	HLP-7.5/2
Full Load Torque :	2.1 Kg-m
Load moment of Inertia (J) :	2.487 Kg-m ²
Motor moment of Inertia (J) :	0.019 Kg-m ²

7.5kW	10HP	2P	60 Hz
Speed at Full Load : 3525 RPM			
Rated Voltage	440V	380V	220V
Full Load Current	12.5A	14.5A	25.1A

SPEED VS TORQUE & CURRENT CURVE

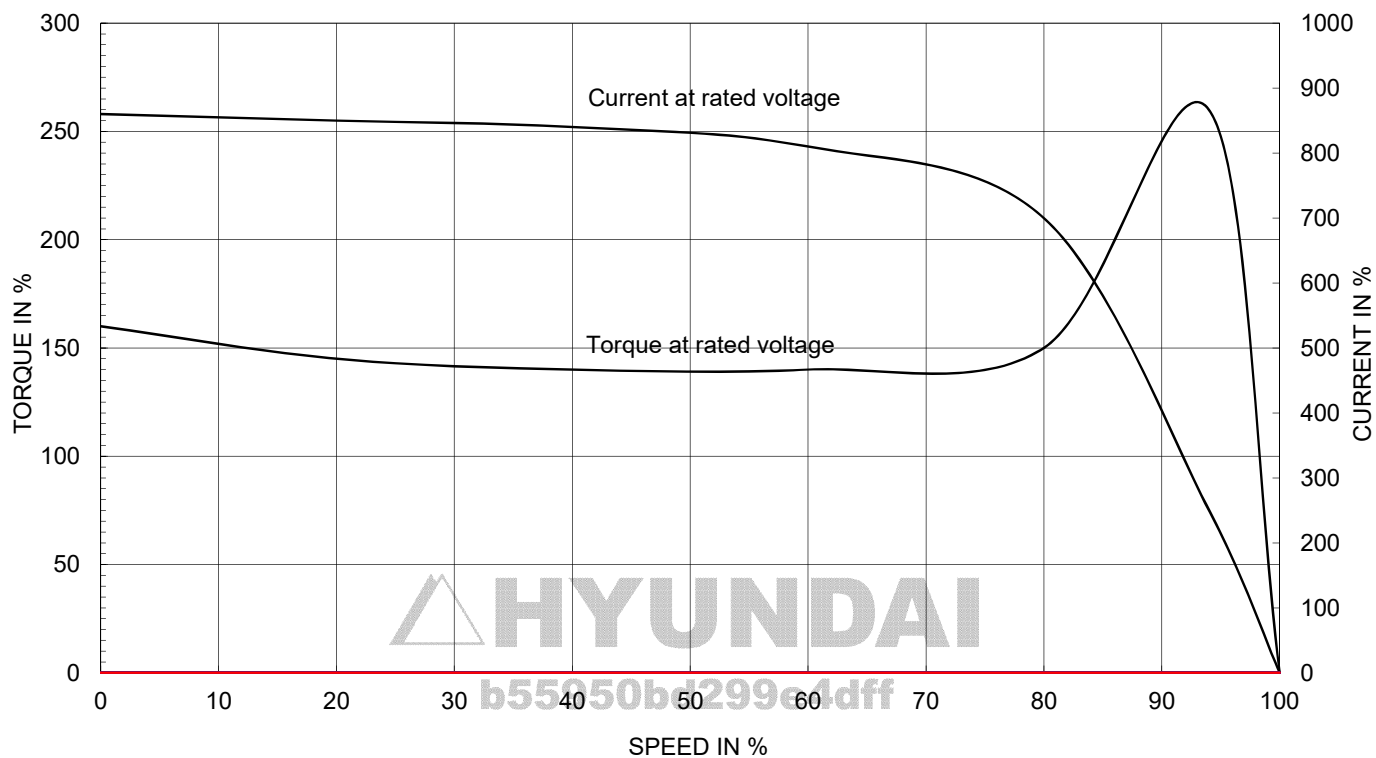


OUTPUT VS EFF., P.F & CURRENT CURVE

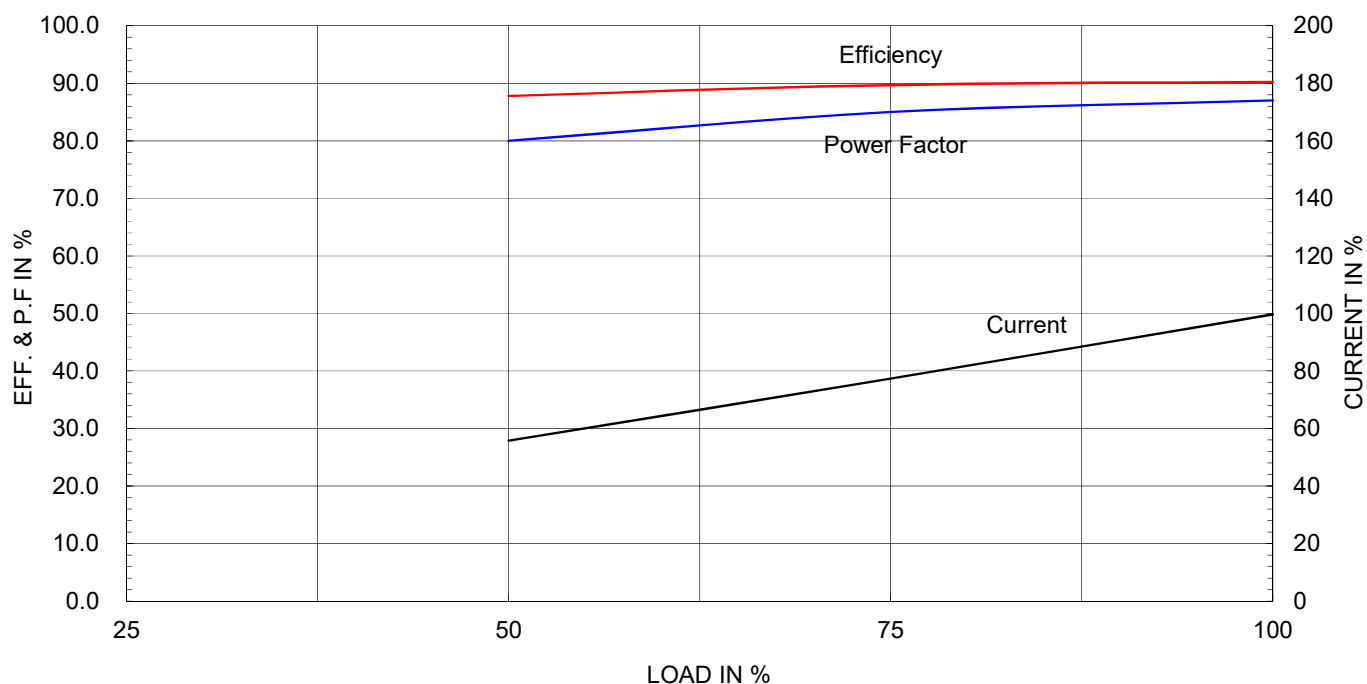

1	2	3	4
▽	50S	REV	DATE
▽▽	12.5S		
▽▽▽	3.2S		
▽▽▽▽	0.4S		


REVD BY	CHKD BY	CHKD BY	APPD BY
---------	---------	---------	---------

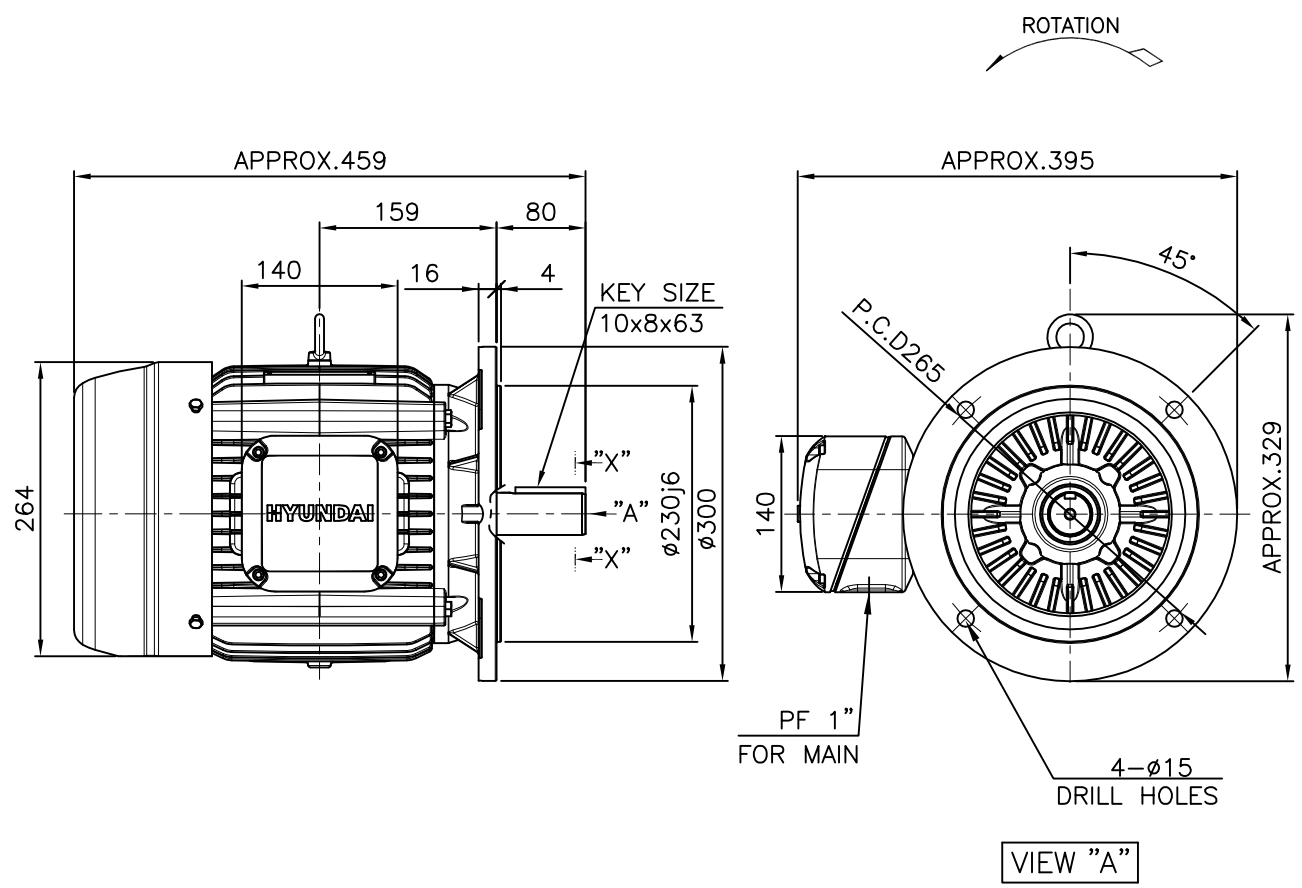

NOTE

1.TOLERANCE :

FLANGE HOLE	Ø15	$+0.43$ 0
RABBET DIAMETER	Ø230	$+0.016$ -0.013
SHAFT DIAMETER	Ø38	$+0.018$ +0.002
KEYWAY WIDTH	10	$+0$ -0.036
KEYWAY DEPTH	5	$+0.2$ 0
KEY WIDTH	10	$+0$ -0.036
KEY HEIGHT	8	$+0$ -0.090

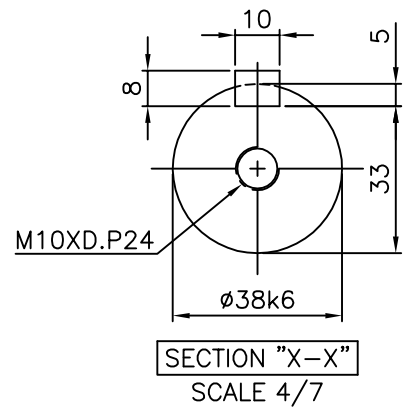


APPD BY	S.K.HAN	UNIT	mm	SUBJECT	KS Fr.132S	DWG SIZE	A4 (1:7)
CHKD BY	I.K.KIM	SCALE	1/7	TITLE	OUTLINE		
CHKD BY	S.H.LEE	PROJEC'N	3각법 (3rd Angle)				
DSND BY	S.R.KIM	DATE	2020.06.19				
HYUNDAI ELECTRIC				REF. NO		Sheet No.	of
				DWG NO	LM-T1131B5PLV01	Revision No.	0

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAY BE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급유의)

HYUNDAI
ELECTRIC

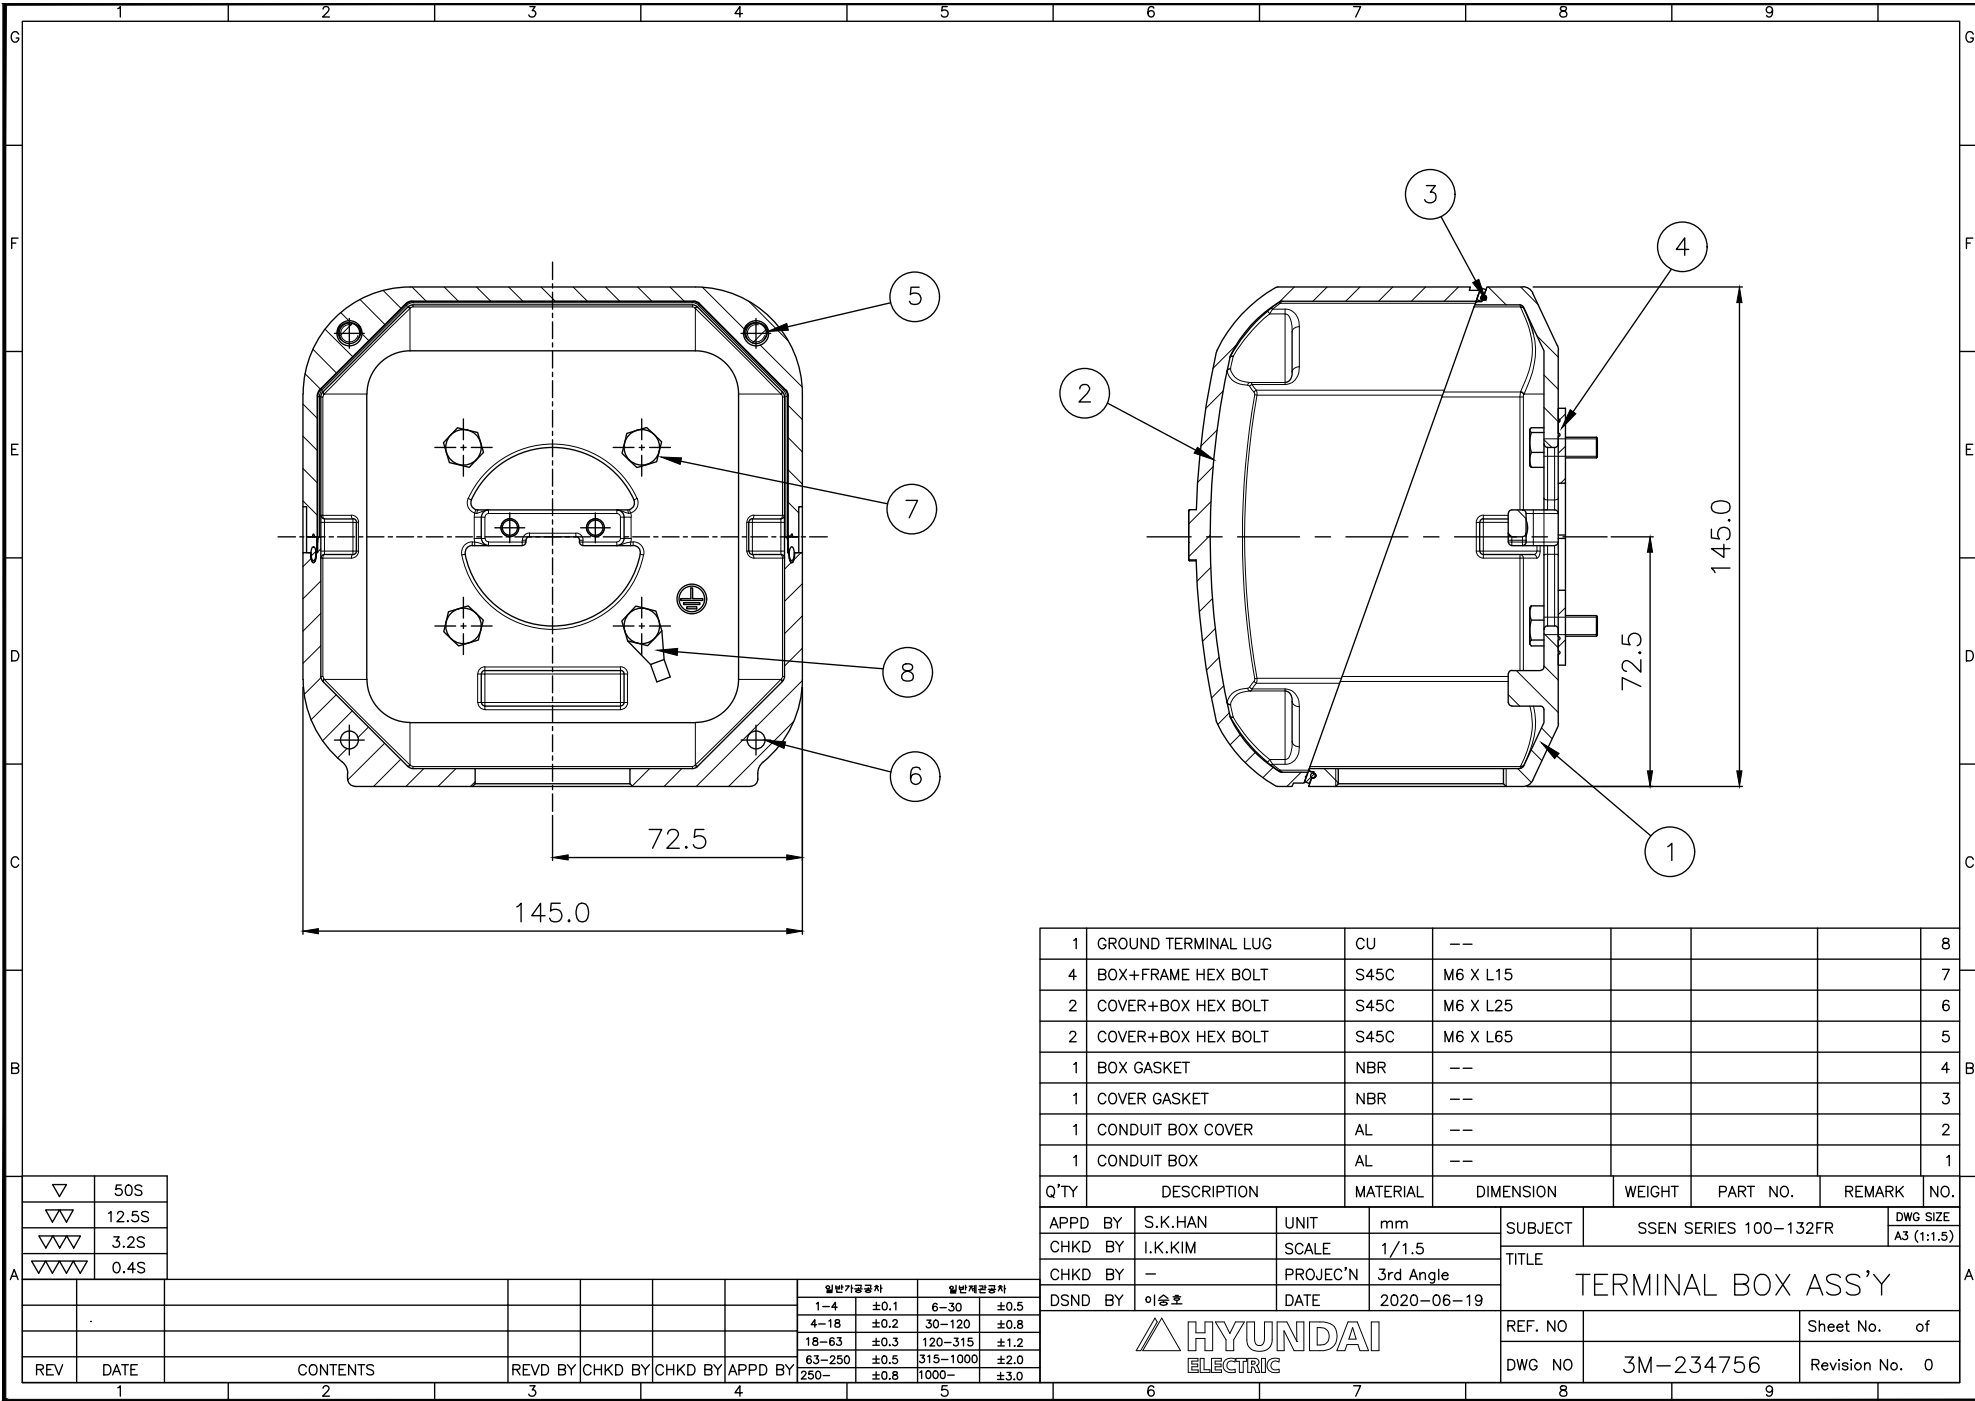

▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REV'D BY	CHK'D BY	CHK'D BY	APPD BY
1						

일반가공공차		일반계관공차	
1~4	±0.1	6~30	±0.5
4~18	±0.2	30~120	±0.8
18~63	±0.3	120~315	±1.2
63~250	±0.5	315~1000	±2.0
250~	±0.8	1000~	±3.0

1	GROUND TERMINAL LUG	CU	--				8	
4	BOX+FRAME HEX BOLT	S45C	M6 X L15				7	
2	COVER+BOX HEX BOLT	S45C	M6 X L25				6	
2	COVER+BOX HEX BOLT	S45C	M6 X L65				5	
1	BOX GASKET	NBR	--				4	
1	COVER GASKET	NBR	--				3	
1	CONDUIT BOX COVER	AL	--				2	
1	CONDUIT BOX	AL	--				1	
Q'TY	DESCRIPTION	MATERIAL	DIMENSION		WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.K.HAN	UNIT	mm	SUBJECT	SSEN SERIES 100-132FR			DWG SIZE A3 (1:1.5)
CHKD BY	I.K.KIM	SCALE	1/1.5	TITLE TERMINAL BOX ASS'Y				
CHKD BY	-	PROJEC'N	3rd Angle					
DSND BY	이승호	DATE	2020-06-19					
				REF. NO			Sheet No.	of
				DWG NO	3M-234756		Revision No.	0
6		7		8		9		

HYUNDAI
ELECTRIC