

Customer :
Project Name :
Project No. :
Revision No. :

SPECIFICATION for INDUCTION MOTOR



Contents


1 . Data Sheet of AC Induction Motor	- 1Sheets
2 . Speed-Torque & Current Curve	- 1Sheets
3 . Outline Dimension Drawing	- 1Sheets
4 . Main Terminal Box Drawing	- 1Sheets

		AC INDUCTION MOTOR DATA SHEET											
Model No.or RFQ No.		4406KSTD40SSDS1STFE3B51DL0SD3		Item No.			Rev. No.		[]				
Project Name				Project No.			Quantity						
GENERAL SPECIFICATION				PERFORMANCE DATA									
Frame Size		160M		Rated Output		11 kW		15 HP					
Type		HLP-11/4		Number of Poles		4							
Enclosure(Protection)		Totally Enclosed (IP55)		Rotor Type		Squirrel Cage							
Method of Cooling		IC411(FC)		Starting Method*		☒ D.O.L		☐ Y-Δ					
Rated Frequency		60 Hz		Rated Voltage		440 V							
Number of Phases		3		Current		Full Load		19.2 A					
Insulation Class		☒ F ☐ B ☐ H				Locked-rotor**		750 %					
Temp. Rise at full load (by resistance method)				Efficiency									
at 1.0 S.F		80 deg. C				50% Load		91.4 %					
Motor Location		☒ Indoor ☐ Outdoor				75% Load		92.5 %					
Altitude		Less than 1000				100% Load		92.4 %					
Relative Humidity		Less than 80 %		Power Factor(p.u)									
Ambient Temp.		40 deg. C (Max.)				50% Load		0.642					
Duty Type		Continuous(S1)				75% Load		0.757					
Service Factor		1.15				100% Load		0.814					
Mounting		☐ B3 ☒ B5 ☐ V1 ☐ B3/B5		Speed at Full Load		1775 r.p.m							
Bearing	Type	Anti-Friction		Torque									
	DE/N-DE	6309ZZC3 / 6309ZZC3				Full Load		6.0 kg·m					
	Lubricant	Grease(Polyrex-EM)				Locked-rotor**		200 %					
External Thrust		Not applicable				Breakdown**		240 %					
Coupling Method		☒ Direct ☐ V-Belt		Moment of Inertia (J)									
Shaft Extension		☒ Single ☐ Double				Load(Max.)		9.000 kg·m²					
Terminal Box	Main	☐ Steel ☒ Cast Iron				Motor		0.090 kg·m²					
	Aux.	☐ Yes ☒ No				Sound Pressure Level (No-load & mean value at 1m from motor)							
	Location	Refer to Outline Drawing				74 dB(A)							
Application				Vibration		2.2 mm/sec (r.m.s)							
Area classification		Not applicable		Permissible number of consecutive starts		Cold		3 times					
Type of Ex-Protection		Non-Hazardous				Hot		2 times					
Applicable Standard		KS, IEC, NEMA MG1 Part30(Vpeak)		Paint		Munsell No.		4.4PB5.5/5.6(VL-451)					
ACCESSORIES				SUBMITTAL DRAWING									
				Outline Dimension Drawing		\		Motor Weight(Approx.)					
				B5		LM-T1163B5PL001		124 kg					
				Main T-Box Ass'y		3M-145860							
				REMARK									
				*.Premium Efficiency(IE3)									
				*.For use on PWM VFD 10:1VT,3:1CT@1.0S.F&F Temp.rise									
SPARE PARTS													
				Date		DSND		CHKD		CHKD		APPD	
				2018-04-25		R.G. KIM		-		O.J. KIM		S.K. HAN	
Note: Others not mentioned in this data sheet shall be in accordance with maker standard. Above technical data are only design values and shall be guaranteed with tolerance of applicable standard. Inspection and performance test shall be maker standard, if not mentioned. * In case of Inverter-Fed Motor, performance data is based on sine wave tests. ** The data are based on rated voltage & frequency, and data are expressed as a percentage of full load value.													


Type :	HLP-11/4	
Full Load Torque :	6.0	kg.m
Motor moment of Inertia (J) :	0.090	kg.m ²
Load moment of Inertia (J) :	9.000	kg.m ²

11 kW	4 P	60 Hz
Speed at Full Load : 1775 RPM		
Rated Voltage	440V	
Full Load Current	19.2A	

SPEED VS TORQUE & CURRENT CURVE

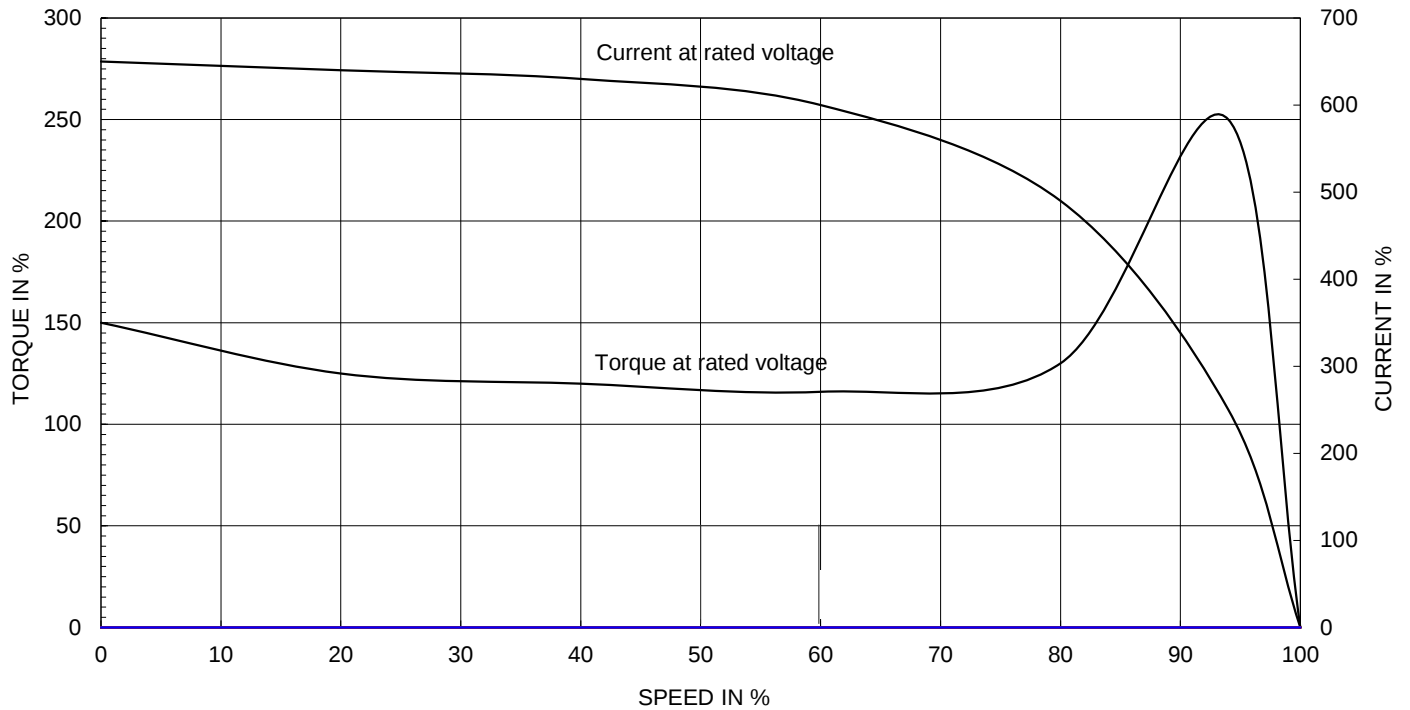


OUTPUT VS EFF., P.F & CURRENT CURVE

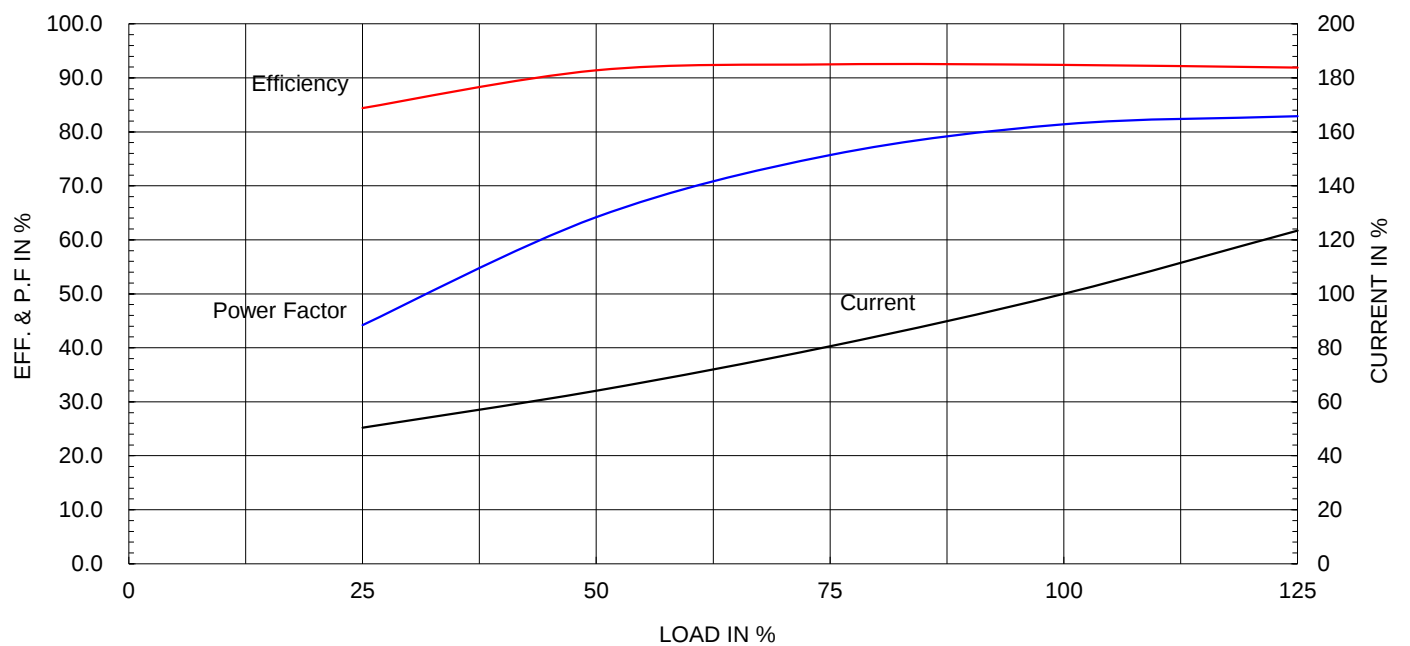

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급주의)

HYUNDAI
ELECTRIC

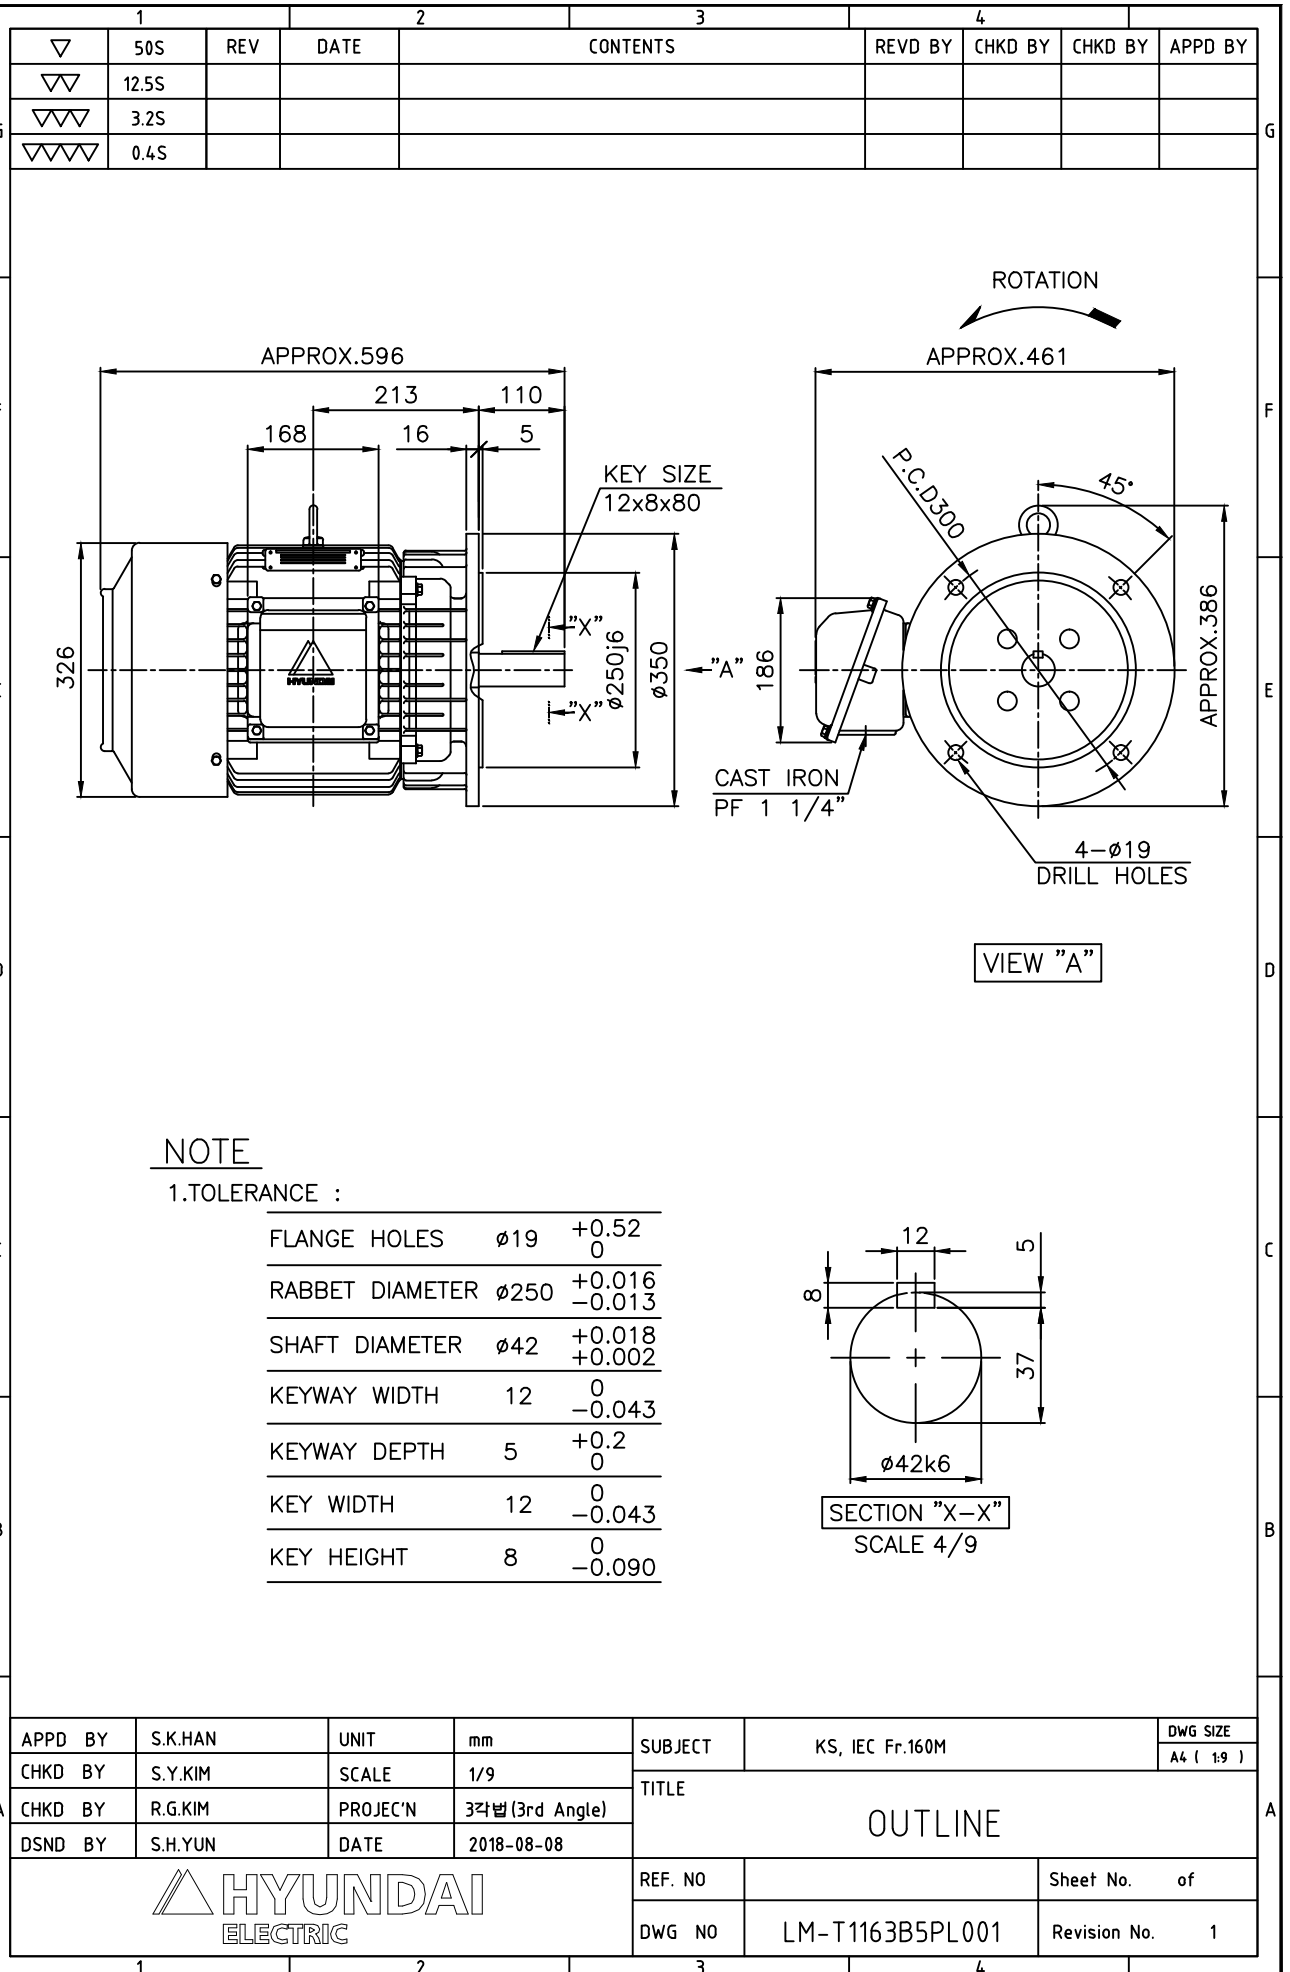

THIS DRAWING IS PROPRIETARY TO HYUNDAI ELECTRIC. NO PART OF THIS DRAWING
MAYBE REPRODUCED WITHOUT THE PERMISSION OF HYUNDAI ELECTRIC.

본 도면은 현대일렉트릭(주) 재산이므로
허가없이 복사할 수 없음 (취급주의)

HYUNDAI
ELECTRIC



▽	50S
▽▽	12.5S
▽▽▽	3.2S
▽▽▽▽	0.4S

REV	DATE	CONTENTS	REVD BY	CHKD BY	CHKD BY	APPD BY

일반가공공차				일반재관공차			
1-4	±0.1	6-30	±0.5	1-4	±0.1	6-30	±0.5
4-18	±0.2	30-120	±0.8	4-18	±0.2	30-120	±0.8
18-63	±0.3	120-315	±1.2	18-63	±0.3	120-315	±1.2
63-250	±0.5	315-1000	±2.0	63-250	±0.5	315-1000	±2.0
250-	±0.8	1000-	±3.0	250-	±0.8	1000-	±3.0

Q'TY	DESCRIPTION		MATERIAL	DIMENSION	WEIGHT	PART NO.	REMARK	NO.
APPD BY	S.K.HAN	UNIT	mm	SUBJECT	FR.160~180 (CAST IRON)			DWG SIZE
CHKD BY	S.Y.KIM	SCALE	1/2	TITLE Main Terminal Box Assembly				
CHKD BY	R.G.KIM	PROJEC'N	3각법 (3rd Angle)					
DSND BY	H.K.LEE	DATE	2011-08-30					
				REF. NO	227B8008LA2		Sheet No.	of
				DWG NO	3M-145860		Revision No.	2
6		7		8		9		