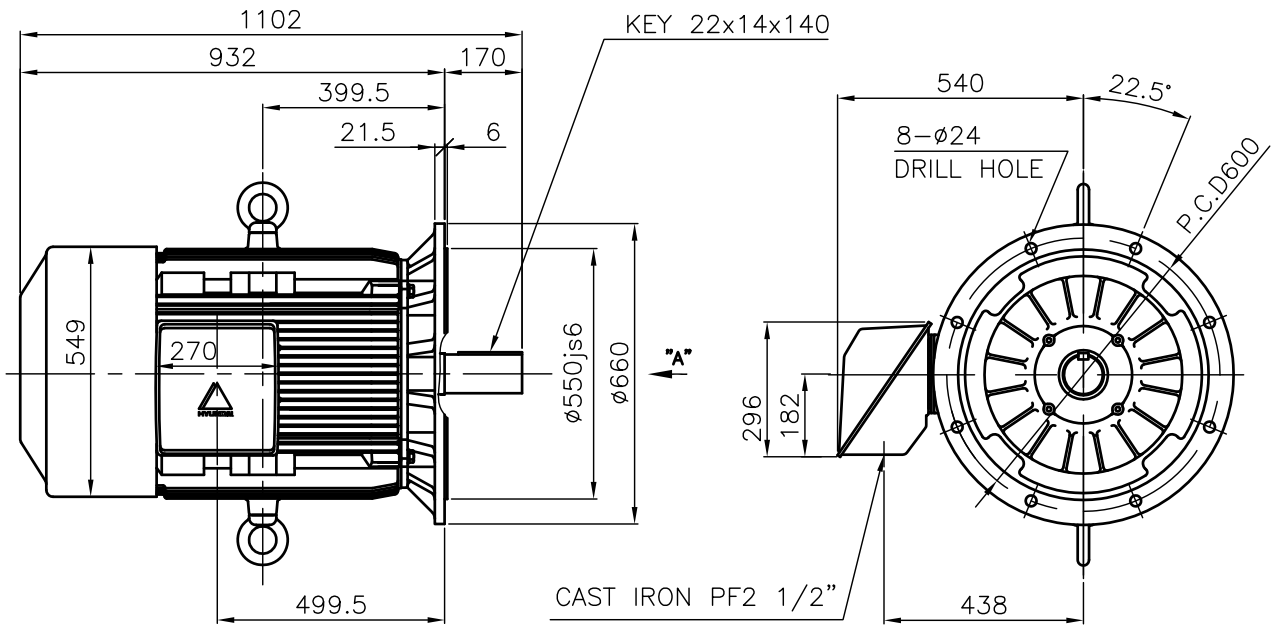



		DATA SHEET of AC INDUCTION MOTOR				75 HP - 8 P TE		
						DESIGN NO : KS C4202-1996		
Model No.or RFQ No.		Item No.		Rev. No.		[0]		
Project Name		Project No.		Quantity :				
GENERAL SPECIFICATION				PERFORMANCE DATA				
Frame No.		280S		Output		75 HP 55 KW		
Type		TNB		Poles		8 P		
Enclosure(Protection)		Totally Enclosed (IP IP54)		Rotor Type		Squirrel Cage		
Cooling Method		IC411(FC)		Starting Method(*)		☒ D.O.L. ☐ Y-Δ		
Frequency		60 Hz		Rated Voltage		440 V 380 V 220 V		
Phase		3 Φ		Current		Rated Load		
Insulation Class		☒ F ☐ B ☐ H				Start'g-D.O.L.		
Temp. Rise at full load (by resistance method)				Efficiency				
at 1.0 S.F		105 °C		50% Load		91.8 %		
Location		☐ Indoor ☐ Outdoor		75% Load		92.7 %		
Altitude		Less than 1000 meter		100% Load		92.7 %		
Humidity		Less than 80 %		Power Factor				
Ambient Temp.		40 °C (Max.)		50% Load		72.5 %		
Duty		CONT.(S1)		75% Load		78.0 %		
Service Factor		1.00		100% Load		81.7 %		
Electric Design		NEMA Design B		Speed at Rated Load		880 RPM / SLIP 2.22 %		
Construction		☐ B3 ☐ B5 ☐ V1 ☐		Torque (D.O.L)				
Bearing		Type		Anti-friction		Rated		
		DE/ODE		6318C3 \ 6316C3		Starting		
		Lubricant		GREASE(ALVANIA#2)		Break down		
External Thrust		Not applicable		Allowable Load GD ² referred to motor shaft				
Coupling Method		☒ Direct ☐ V-Belt				507.100 Kg.m ²		
Shaft Extension		☒ Single ☐ Double		Motor GD ²		9.890 Kg.m ²		
Terminal Box		Main		☐ Steel ☒ Cast Iron		Noise Level (dB(A))		
		Aux.		☐ Yes ☒ No		Vibration(Velocity)		
		Location		☒ Left ☐ Right		Starting Duty		
(Viewed from Drive End)				Paint		Munsell No. 4.0PB5.4/5.5(VL-451)		
Application				SUBMITTAL DRAWING				
Area Classification		Not applicable		Outline Dimension Drawing \ Motor Weight(Approx.)				
Applicable Standard		KS		☐ B3		TJ8SAP51		
Inspection and Performance Test		HHI Stand. Maker Test Report		☐ B5		TJ80BP51		
				☐ V1		TJ80PP51		
ACCESSORIES(OPTION ITEM)				Main T-Box Ass'y				
				3M-016882				
SPARE PARTS				REMARK				
Note: Others not mentioned in this specification shall be in accordance with HHI standard. Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.				Date	DSND	CHKD	CHKD	APPD
				2004.01.27	KIM R.G.		KIM O.J.	KANG K.G.

1	2	3	4																												
 HYUNDAI HEAVY INDUSTRIES CO., LTD.		TEFC THREE PHASE INDUCTION MOTOR																													
		TYPE	(1) TNB , TDB CAST IRON FRAME																												
 NOTE 1.TOLERANCE : <table border="1"><tr><td>RABBET DIAMETER</td><td>ø550js6</td><td>±0.022</td></tr><tr><td>SHAFT DIAMETER</td><td>ø85m6</td><td>+0.035 +0.013</td></tr><tr><td>KEYWAY WIDTH</td><td>22P9</td><td>-0.022 -0.074</td></tr><tr><td>KEYWAY DEPTH</td><td>9</td><td>+0.2 0</td></tr></table> 2.The type (1)-"TNB , TDB" is for HHI's standard products and it can be changed for customer's requirements or detail designing.  VIEW "A" SCALE 4/1				RABBET DIAMETER	ø550js6	±0.022	SHAFT DIAMETER	ø85m6	+0.035 +0.013	KEYWAY WIDTH	22P9	-0.022 -0.074	KEYWAY DEPTH	9	+0.2 0																
RABBET DIAMETER	ø550js6	±0.022																													
SHAFT DIAMETER	ø85m6	+0.035 +0.013																													
KEYWAY WIDTH	22P9	-0.022 -0.074																													
KEYWAY DEPTH	9	+0.2 0																													
<table border="1"><tr><td colspan="4">TEFC STANDARD</td></tr><tr><td>APPD BY</td><td>KANG K.J.</td><td>UNIT</td><td>MM</td></tr><tr><td>CHKD BY</td><td>KIM O.J.</td><td>SCALE</td><td>1/17</td></tr><tr><td>CHKD BY</td><td>LEE N.D.</td><td>PROJEC'N</td><td>3rd Angle</td></tr><tr><td>DSND BY</td><td>KIM RYANG GYU</td><td>DATE</td><td>2007.03.23</td></tr><tr><td colspan="2"> HYUNDAI HEAVY INDUSTRIES CO., LTD. INDUSTRIAL & POWER SYSTEMS</td><td>REF. NO</td><td>L3-Series</td></tr><tr><td colspan="2"></td><td>DWG NO</td><td>TJ80BP51</td></tr></table>				TEFC STANDARD				APPD BY	KANG K.J.	UNIT	MM	CHKD BY	KIM O.J.	SCALE	1/17	CHKD BY	LEE N.D.	PROJEC'N	3rd Angle	DSND BY	KIM RYANG GYU	DATE	2007.03.23	 HYUNDAI HEAVY INDUSTRIES CO., LTD. INDUSTRIAL & POWER SYSTEMS		REF. NO	L3-Series			DWG NO	TJ80BP51
TEFC STANDARD																															
APPD BY	KANG K.J.	UNIT	MM																												
CHKD BY	KIM O.J.	SCALE	1/17																												
CHKD BY	LEE N.D.	PROJEC'N	3rd Angle																												
DSND BY	KIM RYANG GYU	DATE	2007.03.23																												
 HYUNDAI HEAVY INDUSTRIES CO., LTD. INDUSTRIAL & POWER SYSTEMS		REF. NO	L3-Series																												
		DWG NO	TJ80BP51																												
		SUBJECT KS Fr.280 TEFC																													
		TITLE OUTLINE THREE-PHASE INDUCTION MOTOR																													
		Sheet No.	of																												
		Revision No.	0																												

G

F

E

D

C

B

A



HYUNDAI

HEAVY INDUSTRIES CO., LTD

PERFORMANCE CURVE


CURVE NO.

P-TNBJ8S08055

TYPE :		
RATED TORQUE :	60.9	Kg.m
GD2 OF MOTOR :	9.9	Kg.m ²
(ALLOWABLE) GD2 OF LOA	507.1	Kg.m ²

55 kW	8 P	60 Hz
RATED SPEED :	880 RPM	
VOLTAGE	440V	380 V
RATED CURRENT	95.3A	110.3 A
		190.6A

SPEED VS TORQUE & CURRENT CURVE

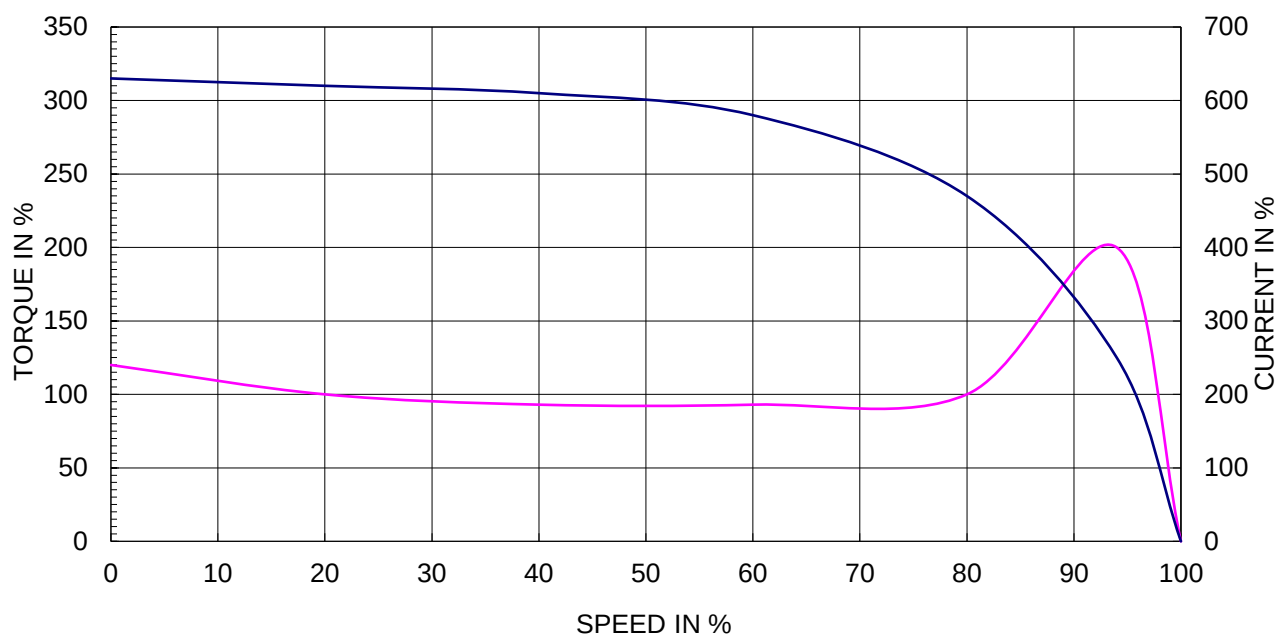

OUTPUT VS EFF., P.F & CURRENT CURVE

