

AC INDUCTION MOTOR DATA SHEET

Model No.or RFQ No.		Item No.		Rev. No. [0]			
Project Name		Project No.		Quantity sets			
GENERAL SPECIFICATION			PERFORMANCE DATA				
Frame Size	90L		Rated Output	1.5 kW 2 HP			
Type	HK-XP		Number of Poles	2			
Enclosure(Protection)	Explosion Proof (IP55)		Rotor Type	Squirrel Cage			
Method of Cooling	IC411(FC)		Starting Method*	☒ D.O.L ☐ Y- Δ			
Rated Frequency	60 Hz		Rated Voltage	440 V	380 V 220 V		
Number of Phases	3		Current	Full Load 2.7 A	3.1 A 5.4 A		
Insulation Class	☒ F ☐ B ☐ H		Locked-rotor**	780 %	780 % 780 %		
Temp. Rise at full load (by resistance method)			Efficiency				
at 1.0 S.F 80 deg. C			50% Load 81.0 %				
Motor Location	☐ Indoor ☒ Outdoor		75% Load 83.5 %				
Altitude	Less than 1000 meter		100% Load 84.0 %				
Relative Humidity	Less than 80 %		Power Factor(p.u)				
Ambient Temp.	40 deg. C (Max.)		50% Load 0.760				
Duty Type	Continuos (S1)		75% Load 0.830				
Service Factor	1.00		100% Load 0.868				
Mounting	☐ B3 ☐ B5 ☒ V1 ☐ B3/B5		Speed at Full Load 3500 r.p.m				
Bearing	Type	Anti-Friction	Torque				
	DE/N-DE	6205ZZ / 6204ZZ	Full Load 0.4 kg·m				
	Lubricant	Grease(SML4)	Locked-rotor** 300 %				
External Thrust	Not applicable		Breakdown** 320 %				
Coupling Method	☒ Direct ☐ V-Belt		Moment of Inertia (J)				
Shaft Extension	☒ Single ☐ Double		Load(Max.) 0.250 kg·m²				
Terminal Box	Main	☐ Steel ☒ Cast Iron	Motor 0.0017 kg·m²				
	Aux.	☐ Yes ☒ No	Sound Pressure Level (No-load & mean value at 1m from motor)				
	Location	Refer to Outline Drawing	74 dB(A)				
Application			Vibration 1.6 mm/sec (r.m.s)				
Area classification	Hazardous		Permissible number of consecutive starts				
Type of Ex-Protection	Ex d IIB T4		Cold 3 times				
Applicable Standard	KS,IEC		Hot 2 times				
			Paint	Munsell No.	4.0PB5.4/5.5(VL-451)		
ACCESSORIES			SUBMITTAL DRAWING				
			Outline Dimension Drawing \ Motor Weight(Approx.)				
			B3		kg		
			B5		kg		
			V1	227B5060AD03	30 kg		
			B3/B5		kg		
			Main T-Box Ass'y 227B1536AA				
SPARE PARTS			REMARK				
			High Efficiency				
			Date	DSND	CHKD	CHKD	APPD
			2011-04-14	W.H.BACK	S. J. RA	O. J. KIM	J. H. KIM


Note: Others not mentioned in this data sheet shall be in accordance with maker standard.
 Above technical data are only design values and shall be guaranteed with tolerance of applicable standard.
 Inspection and performance test shall be maker standard, if not mentioned.
 * In case of Inverter-Fed Motor, performance data is based on sine wave tests.
 ** Data is based on when the motor is supplied at rated voltage & frequency. and the data is expressed as a percentage of full-load value.

HHI W230-131-1 * In case of Inverter or V.V.V.F Motor:Performance data is based on sine wave tests. A4(210mm X 297mm)


Type	:	HL-XP
Full Load Torque	:	0.4 Kg.m
Motor moment of Inertia (J)	:	0.002 Kg.m ²
Load moment of Inertia (J)	:	0.250 Kg.m ²



1.5 kW		2 P		60 Hz	
Speed at Full Load :				3500 RPM	
Rated Voltage	440V	380V	220V		
Full Load Current	2.7A	3.1A	5.4A		

SPEED VS TORQUE & CURRENT CURVE

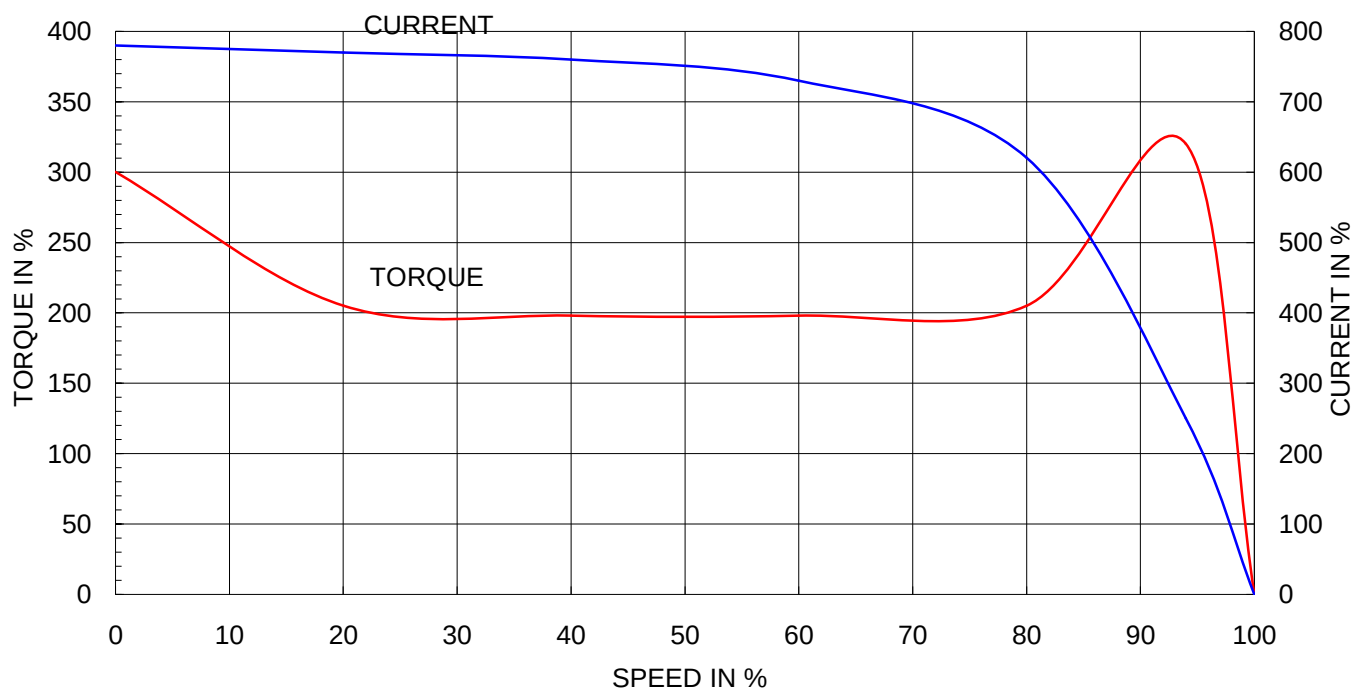

OUTPUT VS EFF., P.F & CURRENT CURVE

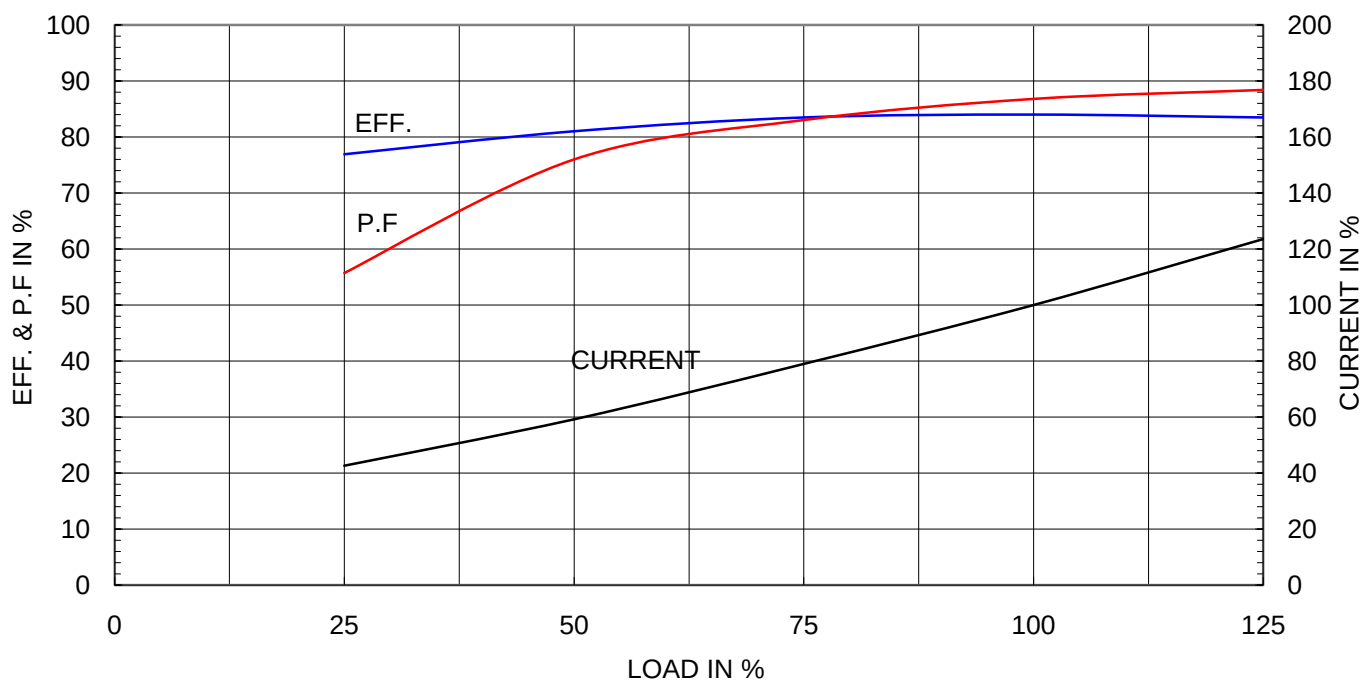


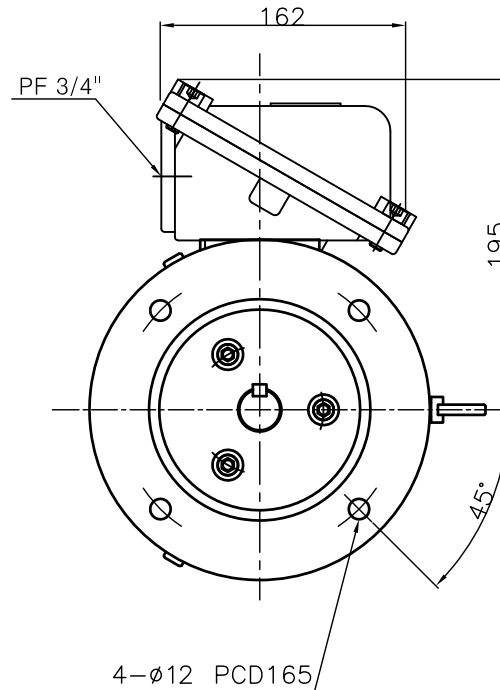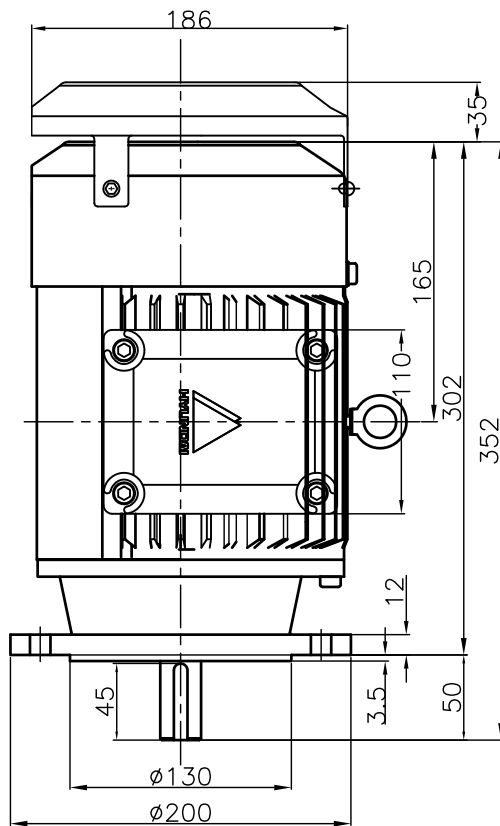

NOTE

1.TOLERANCE :

FLANGE HOLES	$\phi 12^{+0.43}_{-0.}$
RABBET DIAMETER	$\phi 130^{+0.014}_{-0.011}$
SHAFT DIAMETER	$\phi 24^{+0.009}_{-0.004}$
KEYWAY WIDTH	$8^{+0}_{-0.036}$
KEYWAY DEPTH	$4^{+0.2}_{-0}$
KEY SIZE	8*7*45



2. REMARK

DRIP COVER WILL BE ATTACHED PER REQUEST FROM CUSTOMER ONLY

* CAST IRON CONDUIT BOX

APPD BY	B.M.YOO	UNIT	mm	SUBJECT	FF165,IEC 90	CAD PROJ \ FILE
CHKD BY	S.W.SEO	SCALE	1/0.34	TITLE	OUTLINE	D2G4
CHKD BY	J.S.JEONG	PROJEC'N	3rd Angle	REF. NO	091\091ASD2G4	Sheet No. of
DSND BY	C.S.KO	DATE	2008.01.12	DWG NO	227B5060AD03	Revision No. 0

 HYUNDAI HEAVY INDUSTRIES CO., LTD. INDUSTRIAL & POWER SYSTEMS	MD BY	B.M.YOO	UNIT	MM	TITLE CONDUIT BOX ASSEMBLY 6-LEADS	SUBJECT CB ASM	CAD PROJ FILE d204
	CD BY	S.W.SEO	SCALE	1/0.48			
	CD BY	J.S.JEONG	PROJE'N	3rd Angle			
	MD BY	C.S.KO	DATE	2008.01.12			
	REF. NO	227B1536AA1	Sheet No.	of			
DWG NO	227B1536AA1	Revision No.	0				